RNAV (GPS) RWY 12

ROY HURD MEML (EØ1)

WAAS	APP CRS	Rwy Ldg	4268
CH 57927	118°	TDZE	2609
W12A		Apt Elev	2615

RNP APCH GPS.

When local altimeter setting not received, use INK altimeter setting and increase all MDAs 80 feet and LNAV visibility Cat C 3/8 SM, and LP visibility Cat C 1/4 SM, and Circling visibility Cat C 1/2 SM. Rwy 12 helicopter visibility reduction below 1 SM NA. Straight-in Rwy 12 NA at night, Circling Rwy 1, 12, 19 NA at night.

MISSED APPROACH: Climb to 3200 then climbing left turn to 6000 direct INK VORTAC and hold.

AWOS-3PT	FORT WORTH CENTER	UNICOM
118.225	133.1 298.95	122.8 (CTAF) L

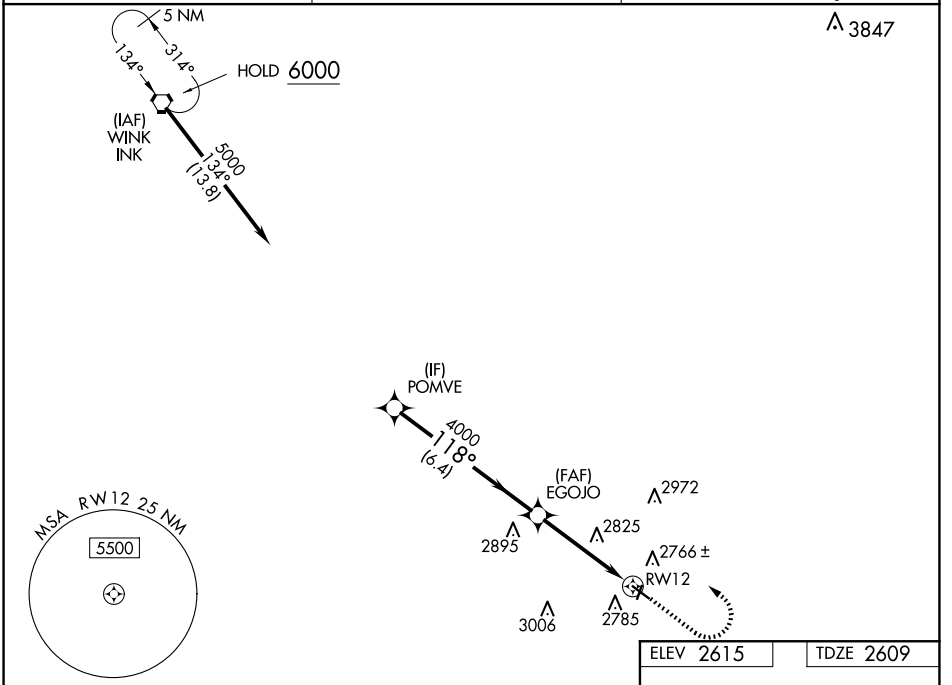

VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 24).



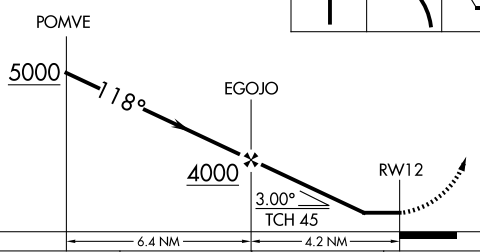



CATEGORY	A	B	C	D
LP MDA	3100-1	491 (500-1)	3100-1⅜ 491 (500-1⅜)	NA
LNAV MDA	3120-1	511 (600-1)	3120-1⅜ 511 (600-1⅜)	NA
CIRCLING	3280-1	665 (700-1)	3280-1¾ 665 (700-1¾)	NA

MIRL Rwys 1-19 and 12-30 L

SC-3, 02 OCT 2025 to 30 OCT 2025
SC-3, 02 OCT 2025 to 30 OCT 2025