

WAAS
CH **81923**
W18A

APP CRS
174°

Rwy Ldg **5001**
TDZE **1177**
Apt Elev **1193**

RNAV (GPS) RWY 18
SUNDANCE (HSD)

RNP APCH - GPS.




▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Baro-VNAV and VDP NA when using PWA altimeter setting.

MISSED APPROACH:
Climb to 3200 direct
NUFAD and hold.

AWOS-3 120.975	OKE CITY APP CON 124.6 266.8	CLNC DEL 123.7	UNICOM 122.7 (CTAF) 0
--------------------------	--	--------------------------	---------------------------------

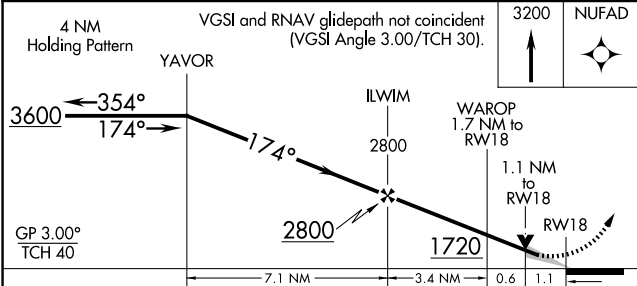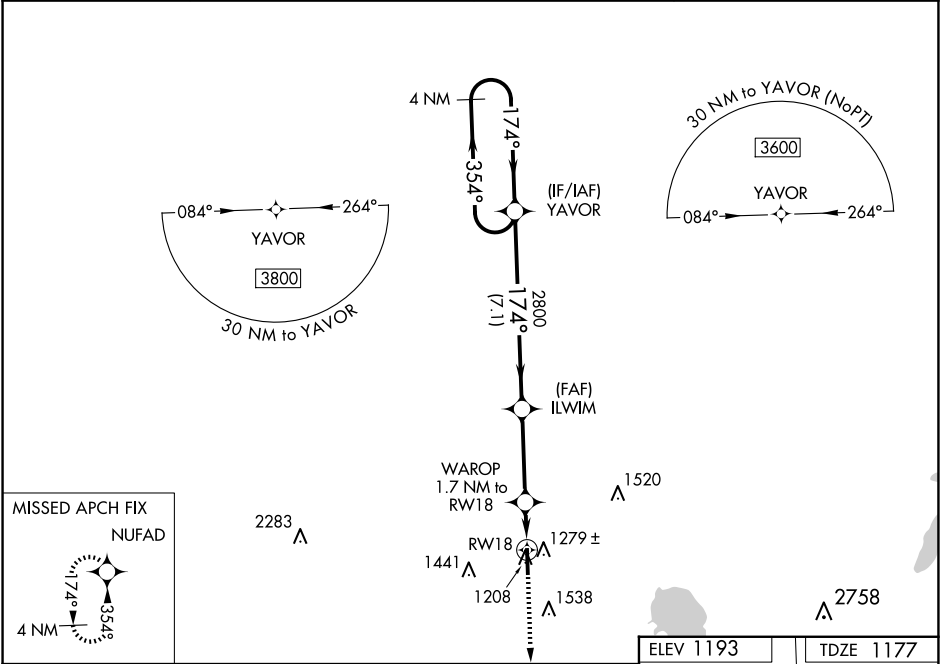

CATEGORY	A	B	C	D
LPV DA	1427-1	250 (300-1)		NA
LNAV/VNAV DA	1473-1½	296 (300-1½)		NA
LNAV MDA	1540-1	363 (400-1)	1540-1½ 363 (400-1½)	NA
CIRCLING	1740-1 547 (600-1)	1840-1 647 (700-1)	1840-1¾ 647 (700-1¾)	NA

