

WAAS CH 50205 W12A	APP CRS 123°	Rwy Idg 5499 TDZE 241 Apt Elev 247
--	------------------------	---

RNAV (GPS) RWY 12


JOHN BELL WILLIAMS (JVW)

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Circling NA for Cat D southwest of Rwy 12-30. Baro-VNAV and VDP NA when using Hawkins Fld altimeter setting. Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Hawkins Fld altimeter setting: increase all DA 36 feet, all MDA 40 feet, all LNAV/VNAV visibilities ⅛ mile, LNAV Cat C and D visibilities ¼ mile, and Circling Cat C and D visibility ¼ mile.

MISSED APPROACH: Climb to 800 then climbing left turn to 2900 direct CIGDA and hold.

AWOS-3PT 118.675	JACKSON APP CON★ 125.25 319.2	UNICOM 123.0 (CTAF) ①
----------------------------	---	---------------------------------

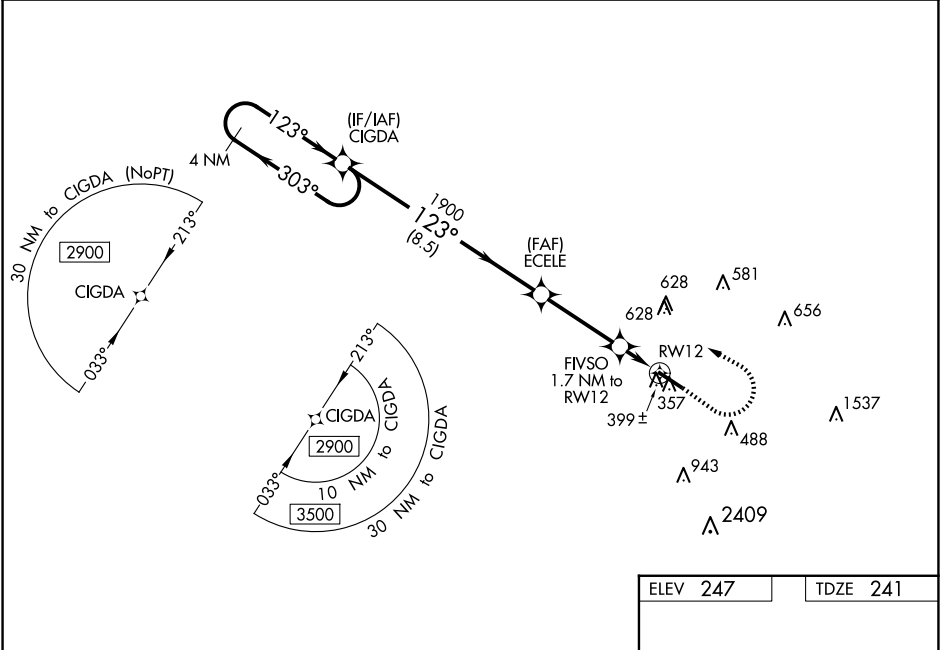

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 38).

4 NM Holding Pattern

CIGDA

ECELE

FIVSO 1.7 NM to RW12

* 1.2 NM to RW12

RW12

GP 3.00° TCH 47

2900

303°

123°

1900

123°

1900

820

8.5 NM

3.4 NM

0.5

1.2

800

2900

CIGDA

* LNAV only

123° to RW12

5499 X 100

5

30

CATEGORY	A	B	C	D
LPV DA		441-¾	200 (200-¾)	
LNAV/VNAV DA		662-1⅓	421 (500-1⅓)	
LNAV MDA	660-1	419 (500-1)	660-1⅓	419 (500-1⅓)
Ⓢ CIRCLING	800-1	553 (600-1)	980-2 733 (800-2)	980-2¼ 733 (800-2¼)

ELEV 247

TDZE 241

MIRL Rwy 12-30 ①

REIL Rwy 12 and 30 ①