


VORTAC SLN 117.1 Chan 118	APP CRS 087°	Rwy Ldg TDZE Apt Elev N/A N/A 1153
---	------------------------	--


VOR-A
ABILENE MUNI (K78)

DME required. RADAR required for procedure entry at CHALK.	MISSED APPROACH: Climb to 2600 then climbing right turn to 3000 on heading 320° and SLN VORTAC R-087 to CHALK/13.1 DME/RADAR and hold.
When local altimeter setting not received, use SLN altimeter setting and increase all MDAs 80 feet and visibility Cat C ¼ SM.	

AWOS-3P 124.125	MARSHALL AAF GCA* 121.25 269.05	UNICOM 122.8 (CTAF) 0
---------------------------	---	--

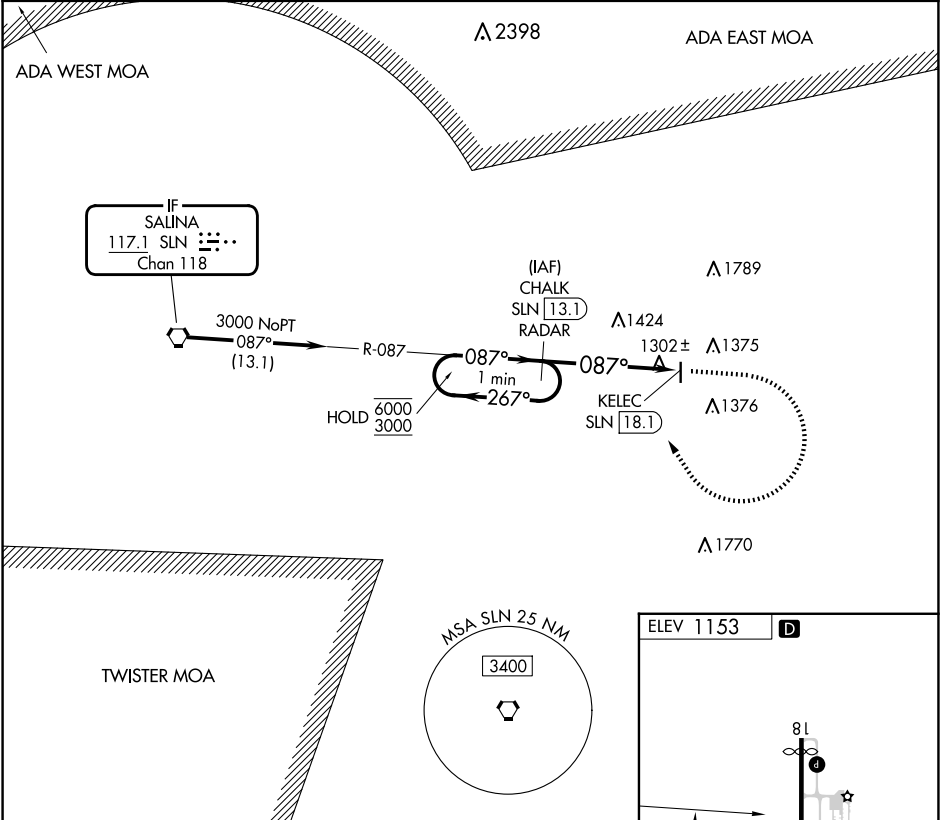

One Minute Holding Pattern	CHALK SLN 13.1 RADAR	2600 ↑	3000 hdg 320°	SLN R-087	CHALK SLN 13.1
6000 3000	← 267° 087° →	KELEC SLN 18.1			
5 NM					
CATEGORY	A	B	C	D	
CIRCLING	1740-1	587 (600-1)	1900-2¼ 747 (800-2¼)	NA	

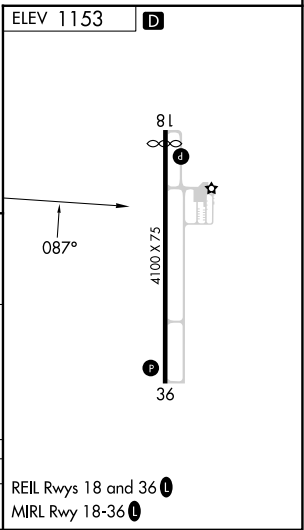

NC-2, 02 OCT 2025 to 30 OCT 2025

NC-2, 02 OCT 2025 to 30 OCT 2025