

WAAS CH 49138 W09A	APP CRS 089°	Rwy Ldg TDZE 1243 Apt Elev 1243
--	------------------------	---


RNAV (GPS) RWY 9
CUMBERLAND MUNI (UBE)

RNP APCH - GPS.

▼ Baro-VNAV NA when using Rice Lake altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Rwy 9 helicopter visibility reduction below ¼ SM NA. VDP NA when using Rice Lake altimeter setting. When local altimeter setting not received, use Rice Lake altimeter setting; increase LPV DA to 1536 feet and LNAV/VNAV DA to 1562 feet and all MDA 60 feet; increase LNAV/VNAV all Cats visibility ⅛ mile and increase LNAV Cat C/D visibility and Circling Cat C/D visibility ¼ mile. Circling Rwy 18, 36 NA at night.

MISSED APPROACH:
Climb to 3400 direct
BURPS and hold.

AWOS-3PT 119.175	MINNEAPOLIS CENTER 125.3 335.6	GCO 121.725	UNICOM 122.8 (CTAF) 0
----------------------------	--	-----------------------	---------------------------------

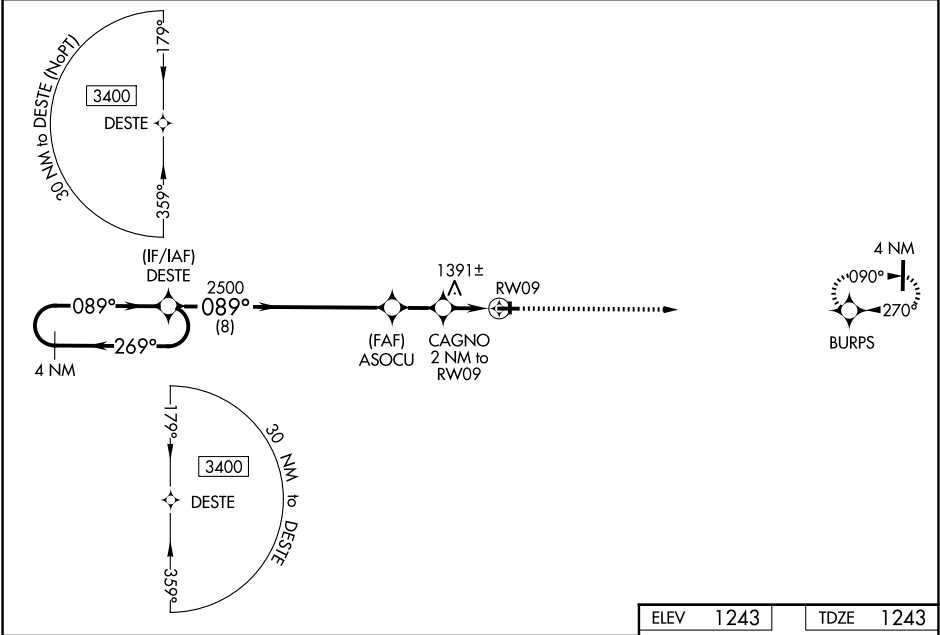

4 NM Holding Pattern DESTE

3400 089° 269° 089°

GP 3.00° TCH 40

ASOCU 2500

CAGNO 2 NM to RWY09

1.2 NM to RWY09

1920

8 NM 1.8 NM 0.8 NM 1.2 NM

CATEGORY	A	B	1.9 NM C	D
LPV DA	1493-1		250 (300-1)	
LNAV/VNAV DA	1519-1		276 (300-1)	
LNAV MDA	1660-1	417 (500-1)	1660-1½	417 (500-1½)
CIRCLING	1660-1 417 (500-1)	1940-1 697 (700-1)	1940-2 697 (700-2)	1980-2¼ 737 (800-2¼)

ELEV 1243 TDZE 1243

3400 BURPS

089° 4043 X 75 120 966.1 36 27

REIL Rwy 9 and 27 0

MIRL Rwy 9-27 0