

WAAS CH 53608 W17A	APP CRS 173°	Rwy Idg 4605 TDZE 1827 Apt Elev 1827
--	------------------------	---

RNAV (GPS) RWY 17

CURTIS FLD (BBD)


RNP APCH - GPS.

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C.
Baro-VNAV and VDP NA when using JCT altimeter setting. When local altimeter setting not received, use JCT altimeter setting: increase LPV DA to 2144 feet; increase LNAV/VNAV DA to 2194 feet; increase all MDAs 120 feet and LNAV visibility Cat C ¾ SM.

MISSED APPROACH: Climb to 4000 direct JENEV and hold.

AWOS-3 118.375	HOUSTON CENTER 132.35 317.5	UNICOM 122.8 (CTAF) 0
--------------------------	---------------------------------------	---------------------------------

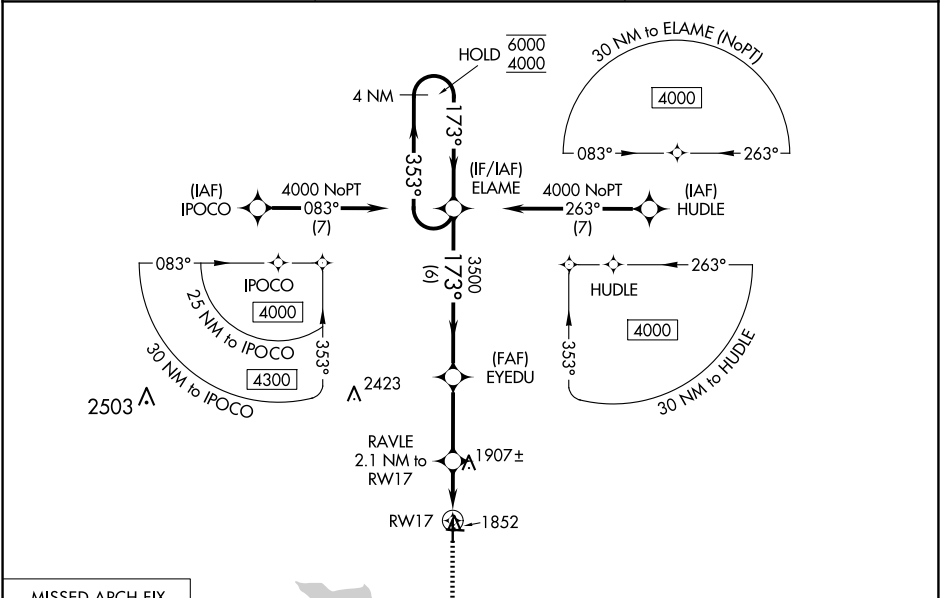

MISSED APCH FIX

JENEV

4 NM

4 NM Holding Pattern

ELAME

6000

4000

GP 3.00°

TCH 40

3500

2540

6 NM

3 NM

1.2 NM

0.9 NM

4000

JENEV

3500

2.1 NM to RW17

0.9 NM to RW17

RW17

CATEGORY	A	B	C	D
LPV DA	2027-1	200 (200-1)		NA
LNAV/VNAV DA	2077-1	250 (300-1)		NA
LNAV MDA	2160-1	333 (400-1)		NA

ELEV 1827

TDZE 1827

173°

4000

3500

3520 X 110

4605 X 75

35

0.3% UP

0.7% UP

MIRL Rwy 17-35 0