

LOC I-JZW <u>110.95</u>	APP CRS 357°	Rwy Idg 6002 TDZE 697 Apt Elev 700
-----------------------------------	------------------------	---

ILS or LOC RWY 36L
FORT WORTH SPINKS (FWS)

RADAR required for procedure entry.


A NA Circling NA west of Rwy 18R-36L. For inop ALS increase S-LOC 36L Cat C/D visibility to 1¾ SM.

MALSR



MISSED APPROACH: Climb to 1800 then climbing left turn to 3100 on heading 269° and FUZ VORTAC R-222 to SLUGG INT/ FUZ 37.5 DME and hold.

ATIS 120.025	LONE STAR APP CON 135,975 379.9	SPINKS TOWER ★ 124.625 (CTAF) 0	GND CON 119,475	UNICOM 122.7
-----------------	------------------------------------	------------------------------------	--------------------	-----------------

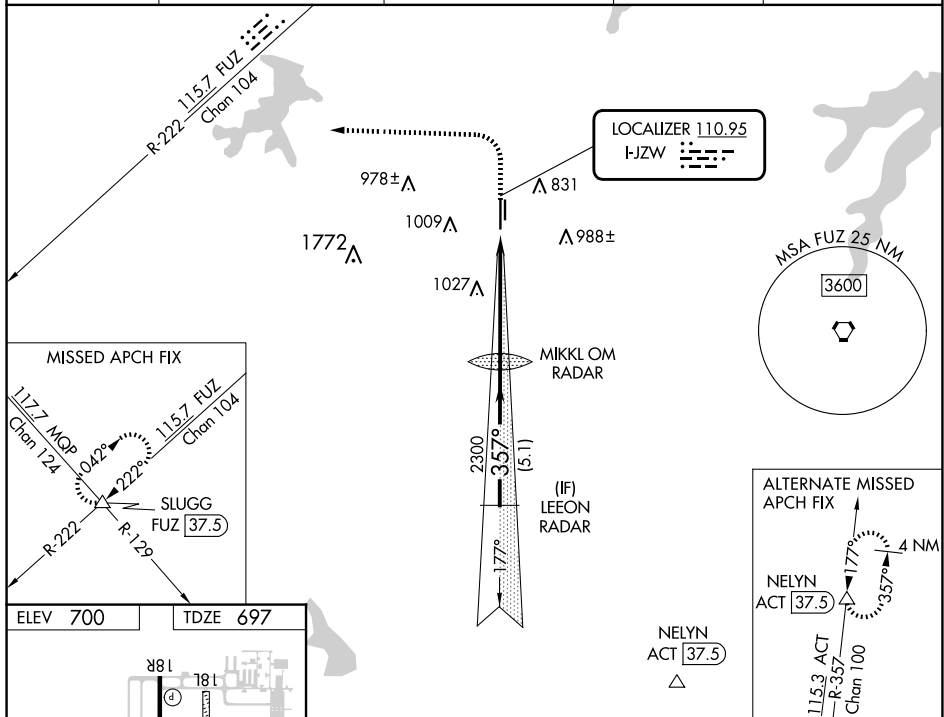

TWR

6002 X 100

3640 X 40

36R ☆

(P)

36L

357°

MRL Rwy 18R-36L

	FAF to MAP 4.8 NM					
Knots	60	90	120	150	180	
Min:Sec	4:48	3:12	2:24	1:55	1:36	

1800 ↑	3100 hdg 269°	FUZ R-222	SLUGG △				
CATEGORY	A	B	C	D			
S-ILS 36L	897-1/2 200 (200-1/2)						
S-LOC 36L	1320-1/2 623 (700-1/2)			1320-13/8 623 (700-13/8)			
CIRCLING	1320-1 620 (700-1)			1340-13/4 640 (700-13/4)		1340-2 640 (700-2)	