

APP CRS
339°

Rwy Idg
TDZE
Apt Elev

3900
2160
2160

RNAV (GPS) RWY 34

PIONEER VILLAGE FLD (ØV3)


RNP APCH - GPS.

▼
▲ NA

Rwy 34 helicopter visibility reduction below 1 SM NA. Use EAR altimeter setting; when not received, use HDE altimeter setting and increase all MDAs 40 feet. Procedure NA at night.

MISSED APPROACH: Climb to 4300 direct CIBSA and hold.

EAR AWOS-3PT 123.875	MINNEAPOLIS CENTER 119.4 278.8	UNICOM 122.7 (CTAF) 0
-------------------------	-----------------------------------	--------------------------

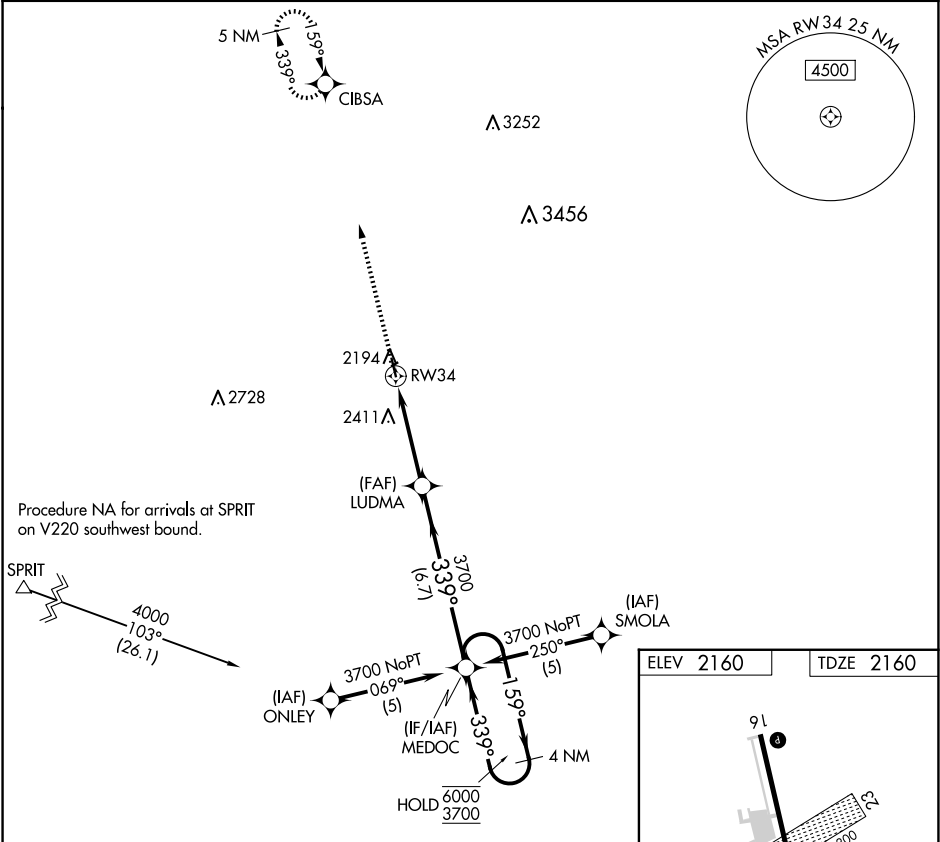

4300 CIBSA

↑

✱

LUDMA

MEDOC

4 NM Holding Pattern

339°

159°

6000 3700

3700

3.50° TCH 40

4.1 NM

6.7 NM

CATEGORY

A

B

C

D

LNAV MDA

2700-1 540 (600-1)

NA

ELEV 2160

TDZE 2160

91

1275 X 300

3900 X 80

34

339°

MIRL Rwy 16-34 0

NC-2, 02 OCT 2025 to 30 OCT 2025

NC-2, 02 OCT 2025 to 30 OCT 2025