

WAAS CH 86711 W15A	APP CRS 146°	Rwy Idg TDZE Apt Elev	5001 10 10
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) RWY 15

SOUTHLAND FLD (UXL)

RNP APCH-GPS

▼



⚠

Inoperative table does not apply to LNAV/VNAV. Baro-VNAV NA when using Lake Charles Rgnl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 48°C. Rwy 15 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Lake Charles Rgnl altimeter setting and increase LPV DA to 328 feet and all visibilities ¼ SM; increase LNAV/VNAV DA to 438 feet; increase all MDAs 20 feet and Circling visibility Cat C/D ¼ SM. VDP NA when using Lake Charles Rgnl altimeter setting.

ODALS

MISSED APPROACH: Climb to 2500 direct WERUM and via 236° track to ZEVEGA and via 309° track to OFERS and hold.

AWOS-3PT 118.175	LAKE CHARLES APP CON ★ 119.35 282.3	UNICOM 122.8 (CTAF) 0
----------------------------	---	---------------------------------

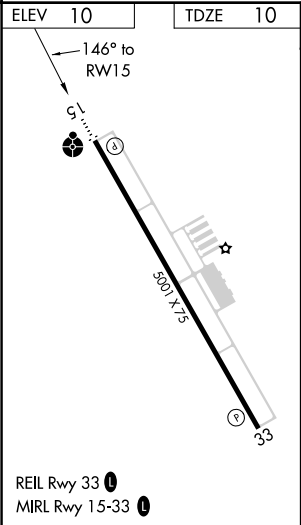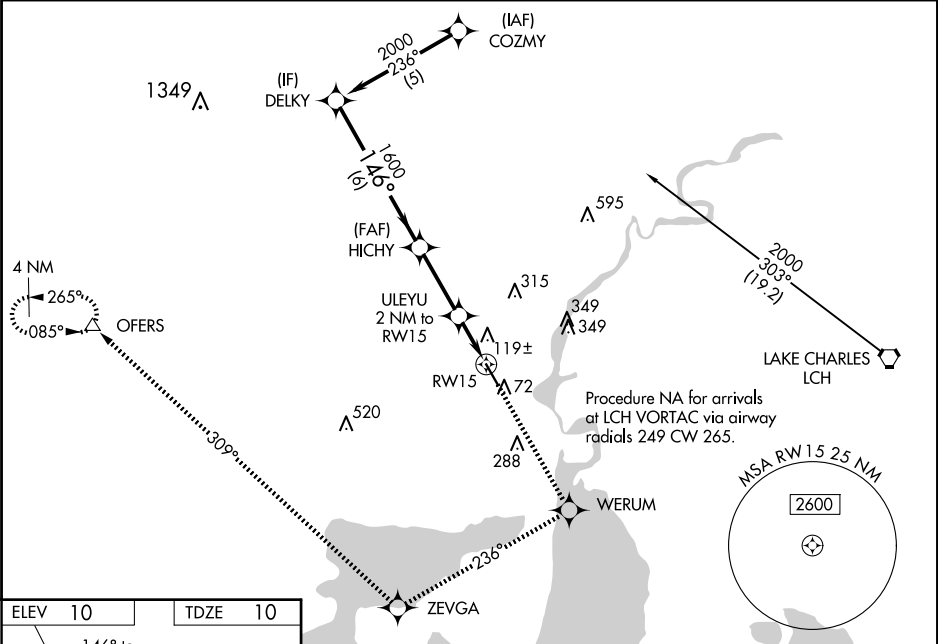

Procedure Turn NA		2500 ↑		WERUM ✧		tr 236°		ZEVEGA ✧		tr 309°		OFERS △	
DELKY													
CATEGORY		A		B		C		D					
LPV DA				309-1		299 (300-1)							
LNAV/ VNAV DA				419-1½		409 (500-1½)							
LNAV MDA		380-¾		370 (400-¾)						380-1¼ 370 (400-1¼)			
CIRCLING		420-1 410 (500-1)		520-1 510 (600-1)		680-1¾ 670 (700-1¾)		680-2 670 (700-2)					