

WAAS CH 78115 W18A	APP CRS 185°	Rwy Idg TDZE Apt Elev	5001 454 458
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 18

PHILADELPHIA MUNI (MPE)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA.


▲ When altimeter setting not received, use Key Fld altimeter setting and increase all DA 101 feet and all MDA 120 feet and increase LPV all Cats, LNAV Cat C and Circling Cats C and D visibility $\frac{1}{4}$ mile, increase LNAV/VNAV all Cats, LNAV Cat D visibility $\frac{1}{2}$ mile. Baro-VNAV and VDP NA when using Key Fld altimeter setting.

MISSED APPROACH:
Climb to 3000 direct
OKDAE and hold.

AWOS-3P
118.725

MEMPHIS CENTER
132.75 263.0

UNICOM
123.0 (CTAF) **L**

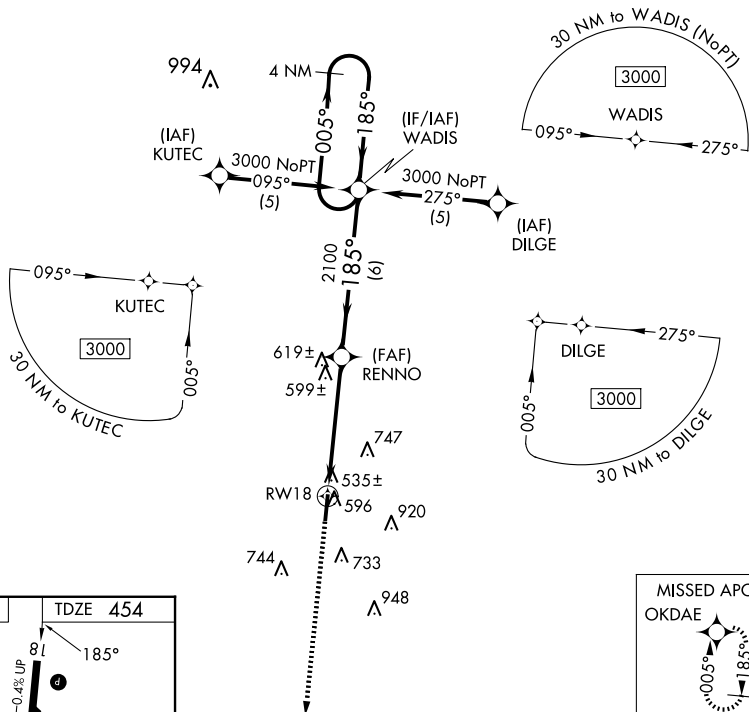

ELEV 458

TDZE 454

185°

81

0.4% UP

5001 X 75

36

MIRL Rwy 18-36

REIL Rws 18 and 36

3000 ↑ OKDAE 		WADIS 4 NM Holding Pattern 005° → 3000 ← 185° GP 3.00° TCH 47							
*LNAV only. *1.5 NM to RW18 RENNO 185° 2100 1.5 3.5 NM 6 NM									
CATEGORY		A		B		C		D	
LPV DA		774-1¼		320 (400-1¼)					
LNNAV/ VNAV DA		850-1½		396 (400-1½)					
LNNAV MDA		960-1 506 (600-1)		960-1½ 506 (600-1½)					
CIRCLING		1060-1 602 (700-1)		1280-2½ 822 (900-2½)		1280-2¾ 822 (900-2¾)			