



|                                        |                        |                                                               |
|----------------------------------------|------------------------|---------------------------------------------------------------|
| WAAS<br>CH <b>60939</b><br><b>W04A</b> | APP CRS<br><b>045°</b> | Rwy Idg <b>5002</b><br>TDZE <b>112</b><br>Apt Elev <b>112</b> |
|----------------------------------------|------------------------|---------------------------------------------------------------|

RNAV (GPS) RWY 4  
DEMOPOLIS RGNL (DYA)


**⚠** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F).  
**⚠** DME/DME RNP-0.3 NA. When local altimeter setting not received, use Marion altimeter setting and increase LPV and LNAV/VNAV DA 82 feet and all MDA 100 feet; increase LPV and LNAV/VNAV all Cats visibility 3/8 mile, increase LNAV Cats C/D and Circling Cat C visibility 1/4 mile, and increase Circling Cat D visibility 1/2 mile. Baro-VNAV and VDP NA when using Marion altimeter setting. Helicopter visibility reduction below 3/4 SM NA.

**MISSED APPROACH:**  
Climb to 3000 direct CUBNO and hold.

|                           |                                           |                                        |
|---------------------------|-------------------------------------------|----------------------------------------|
| AWOS-3P<br><b>119.475</b> | MERIDIAN APP CON*<br><b>121.275 348.7</b> | UNICOM<br><b>122.8</b> (CTAF) <b>0</b> |
|---------------------------|-------------------------------------------|----------------------------------------|

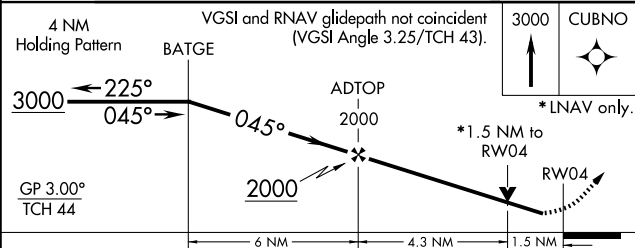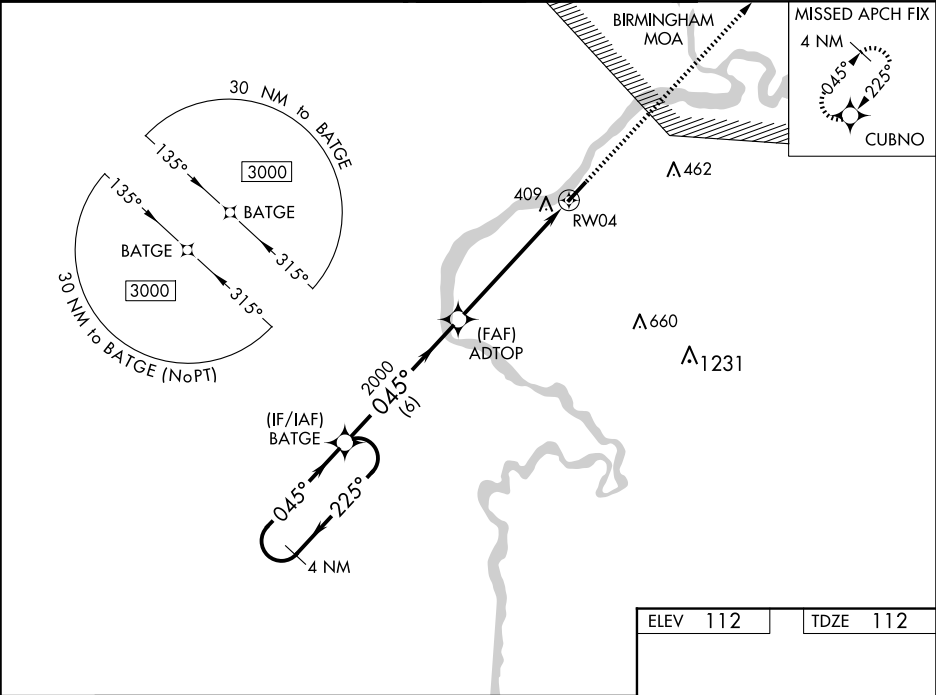

| CATEGORY     | A     | B           | C                            | D                    |
|--------------|-------|-------------|------------------------------|----------------------|
| LPV DA       |       | 362-3/4     | 250 (300-3/4)                |                      |
| LNAV/VNAV DA |       | 570-1 1/2   | 458 (500-1 1/2)              |                      |
| LNAV MDA     | 660-1 | 548 (600-1) | 660-1 5/8                    | 548 (600-1 5/8)      |
| CIRCLING     | 720-1 | 608 (700-1) | 720-1 3/4<br>608 (700-1 3/4) | 780-2<br>668 (700-2) |

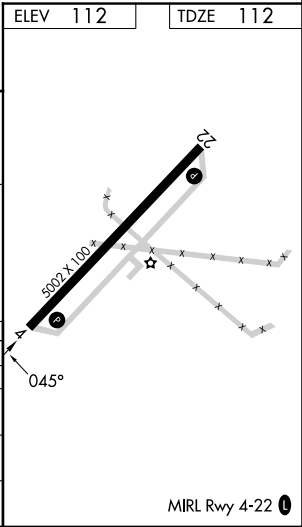

SE-4, 02 OCT 2025 to 30 OCT 2025

SE-4, 02 OCT 2025 to 30 OCT 2025