



▼

▲ NA

Circling NA to Rwy 9L and 27R. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.5°C (5°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Palm Beach Init altimeter setting. DME/DME RNP-0.3 NA. When local altimeter not received, use Palm Beach Init altimeter setting and increase LPV DA to 369 feet and all visibilities ½ SM; increase LNAV/VNAV DA to 423 feet and all visibilities ½ SM; increase all MDA 40 feet and Cat C/D visibility ½ SM. Rwy 27L helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH:
Climb to 2500 direct YIGBO and hold.

AWOS-3 119.975	PALM BEACH APP CON 128.3 317.4	CLNC DEL 120.825	UNICOM 123.075 (CTAF) 0
-------------------	-----------------------------------	---------------------	----------------------------

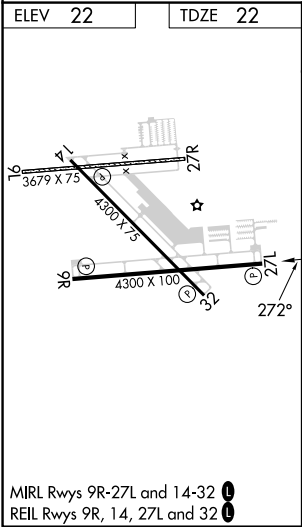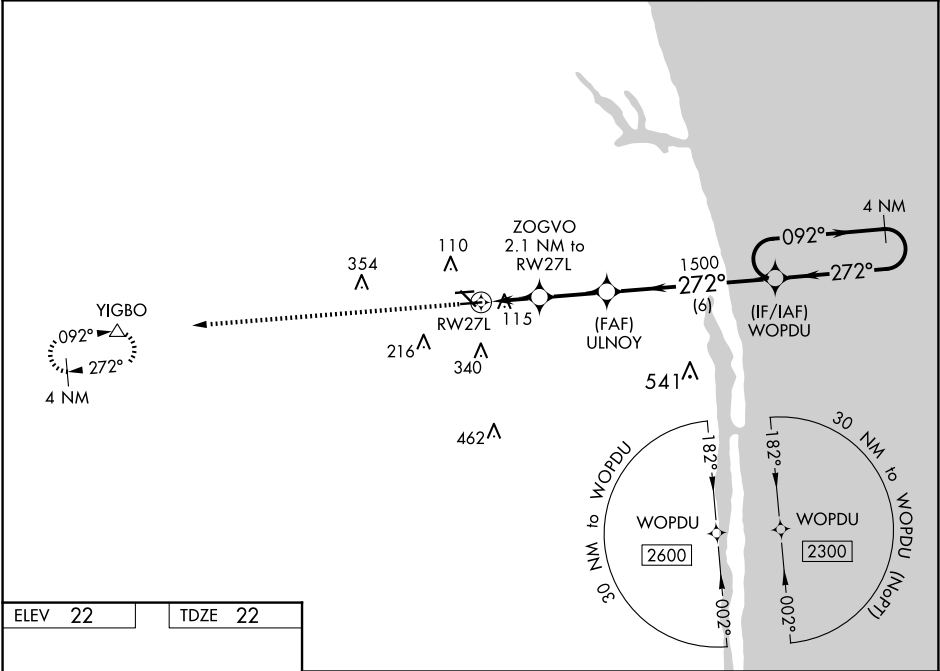

2500 ↑	YIGBO △	*LNAV only. 4 NM Holding Pattern 092° → 2300 ← 272° ZOGVO 2.1 NM to RW27L ULNOY 1500 1500 272° *1 NM to RW27L RW27L *720 GP 3.00° TCH 40 1 NM 1.1 NM 2.4 NM 6 NM			
CATEGORY	A		B	C	D
LPV DA			341-7/8	319 (400-7/8)	
LNAV/VNAV DA			395-1	373 (400-1)	
LNAV MDA			380-1	358 (400-1)	
CIRCLING	460-1 438 (500-1)	480-1 458 (500-1)	700-2 678 (700-2)	720-2¼ 698 (700-2¼)	