

|                                        |                        |                                                               |
|----------------------------------------|------------------------|---------------------------------------------------------------|
| WAAS<br>CH <b>56309</b><br><b>W03A</b> | APP CRS<br><b>029°</b> | Rwy Ldg <b>5498</b><br>TDZE <b>940</b><br>Apt Elev <b>948</b> |
|----------------------------------------|------------------------|---------------------------------------------------------------|


**RNAV (GPS) RWY 3**  
GEORGETOWN-SCOTT COUNTY RGNL (27K)

**⚠ NA**

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16° C (4° F) or above 47° C (116° F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Lexington altimeter setting and increase LPV DA to 1178, LNAV/VNAV DA to 1413, and all MDA 40 feet; increase LPV and LNAV/VNAV visibility all Cats and LNAV Cat C and Circling Cat D visibility ¼ mile. Baro-VNAV and VDP NA when using Lexington altimeter setting.

**MISSED APPROACH:** Climb to 3000 direct ETOXY and left turn on track 281° to GENUS and hold.

|                          |                                                                                   |                            |                                 |
|--------------------------|-----------------------------------------------------------------------------------|----------------------------|---------------------------------|
| AWOS-3<br><b>119.975</b> | LEXINGTON APP CON<br><b>120.15 259.3 (040° - 220°) 120.75 298.9 (221° - 039°)</b> | CLNC DEL<br><b>127.425</b> | UNICOM<br><b>123.0 (CTAF) 0</b> |
|--------------------------|-----------------------------------------------------------------------------------|----------------------------|---------------------------------|

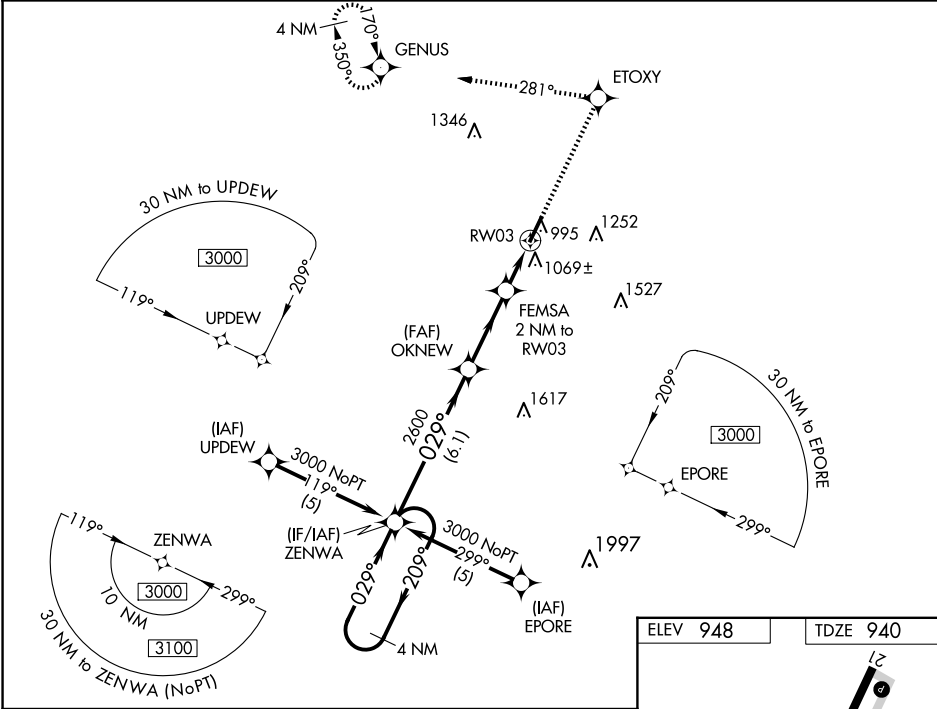

4 NM Holding Pattern ZENWA

3000 ← 209° → 029° → 029°

GP 3.00° TCH 34

OKNEW 2600

FEMSA 2 NM to RW03

\*1.1 NM to RW03


RW03

\*1600

6.1 NM 3.1 NM 0.9 NM 1.1 NM

\*LNAV only.

| CATEGORY     | A      | B           | C                             | D                             |
|--------------|--------|-------------|-------------------------------|-------------------------------|
| LPV DA       |        | 1140-3/4    | 200 (200-3/4)                 |                               |
| LNAV/VNAV DA |        | 1375-1 1/2  | 435 (500-1 1/2)               |                               |
| LNAV MDA     | 1320-1 | 380 (400-1) |                               | 1320-1 1/4<br>380 (400-1 1/4) |
| CIRCLING     | 1420-1 | 472 (500-1) | 1560-1 3/4<br>612 (700-1 3/4) | 1660-2 1/4<br>712 (800-2 1/4) |

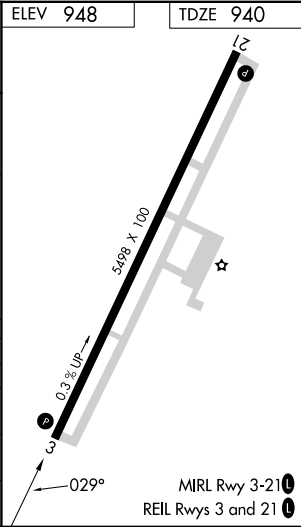

SE-1, 02 OCT 2025 to 30 OCT 2025

SE-1, 02 OCT 2025 to 30 OCT 2025