



WAAS CH 48909 W21A	APP CRS 209°	Rwy Ldg TDZE 948 Apt Elev 948
--	------------------------	---

RNAV (GPS) Z RWY 21
GEORGETOWN-SCOTT COUNTY RGNL (27K)

NA For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16° C (4° F) or above 46° C (114° F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Lexington altimeter setting and increase LPV DA to 1186, LNAV/VNAV DA to 1460, and all MDA 40 feet; increase LPV all Cats and LNAV Cats C/D and Circling Cat D visibility ¼ SM. Baro-VNAV and VDP NA with Lexington altimeter setting.

MISSED APPROACH: Climb to 3000 direct YAPUT and right turn on track 301° to SOKOC and right turn on track 049° to GENUS and hold.

AWOS-3 119.975	LEXINGTON APP CON 120.15 259.3 (040° - 220°) 120.75 298.9 (221° - 039°)	CLNC DEL 127.425	UNICOM 123.0 (CTAF) ①
--------------------------	---	----------------------------	---------------------------------

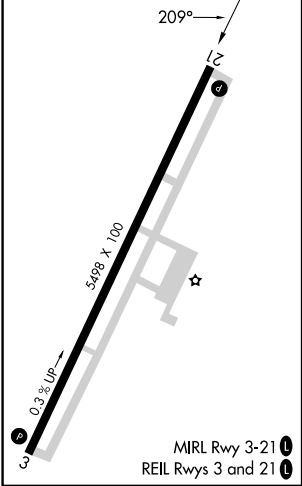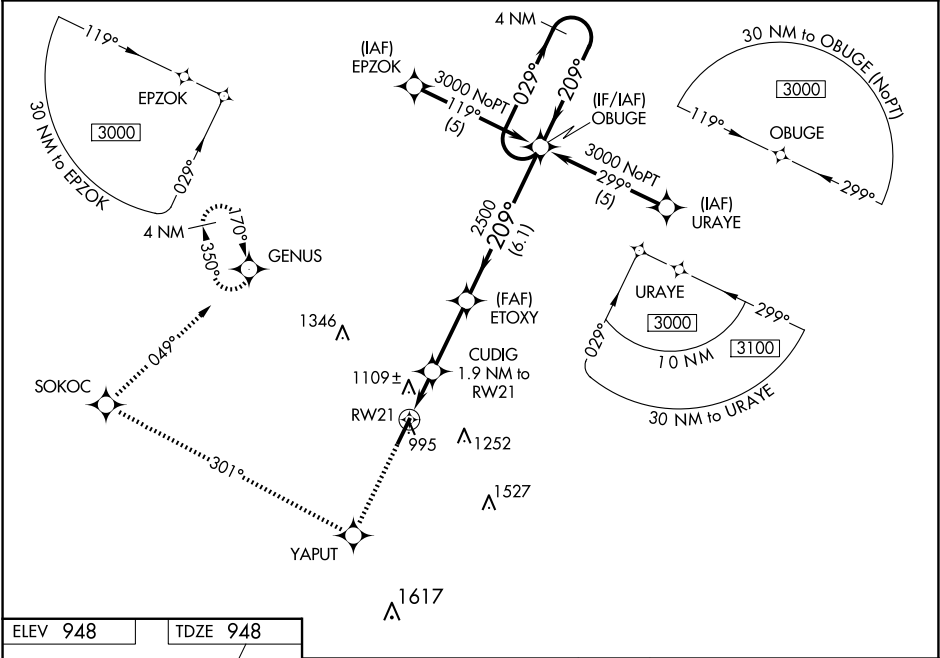

3000 ↑	YAPUT ✧	tr 301° ↷	SOKOC ✧	tr 049° ↷	GENUS ✧
4 NM Holding Pattern					
OBUGE					
*LNAV only. CUDIG 1.9 NM to RW21 ETOXY 2500 209° → ← 209° 3000 GP 3.00° TCH 30 RW21 *1.2 NM to RW21 *1580 2500 1.2 NM 0.7 NM 2.8 NM 6.1 NM					
CATEGORY	A		B	C	
LPV DA			1148-3/4	200 (200-3/4)	
LNAV/VNAV DA			1422-13/4	474 (500-13/4)	
LNAV MDA	1360-1 412 (500-1)		1360-11/4 412 (500-11/4)		
CIRCLING	1420-1 472 (500-1)		1560-13/4 612 (700-13/4)	1660-21/4 712 (800-21/4)	