


WAAS CH 56642 W24A	APP CRS 236°	Rwy Idg TDZE Apt Elev	4494 45 45
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) RWY 24

WAINWRIGHT (AWI) (PAWI)

RNP APCH - GPS.		MISSED APPROACH: Climb to 4000 direct OZYIB and hold, continue climb-in-hold to 4000	
⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C.			
ASOS-3 132.25	ANCHORAGE CENTER 135.3 239.25	BARROW RADIO 122.5	CTAF 122.8 0

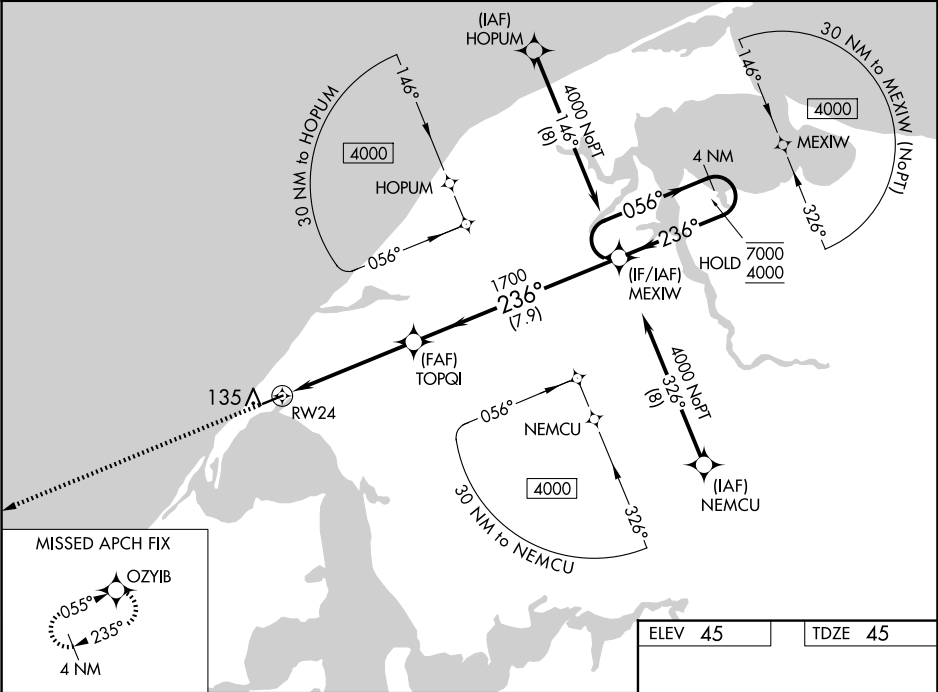

4000	OZYIB	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 30).			
↑	✧				
RW24		1.4 NM to RW24	TOPQI	MEXIW	4 NM Holding Pattern
		1.4 NM	1700	1700	7000 4000
		3.7 NM	236°	056°	GP 3.00° TCH 45
		7.9 NM	236°	056°	
CATEGORY		A	B	C	D
LPV DA			295-1	250 (300-1)	
LNAV/VNAV DA			295-1	250 (300-1)	
LNAV MDA		520-1	475 (500-1)	520-1 $\frac{3}{8}$	475 (500-1 $\frac{3}{8}$)
CIRCLING		520-1	475 (500-1)	520-1 $\frac{1}{2}$ 475 (500-1 $\frac{1}{2}$)	600-2 555 (600-2)

