

WAAS CH 90526 W21A	APP CRS 207°	Rwy Ldg TDZE Apt Elev	5003 537 537
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 21

OHIO COUNTY (JQD)

RNP APCH - GPS.


▼

▲

Baro-VNAV NA when using Owensboro altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Owensboro altimeter setting and increase LPV DA to 858 feet, increase LNAV/VNAV DA to 1082 feet. Increase all MDA 80 feet, increase LNAV/VNAV visibilities all Cats ¼ SM, increase LNAV and Circling Cat C visibility ¼ SM. Rwy 21 helicopter visibility reduction below 1 SM NA. Procedure NA at night.

MISSED APPROACH:
Climb to 3000 direct VUSWO and on track 273° to CCT DME and hold.

AWOS-3PT 132.1	EVANSVILLE APP CON ★ 124.025 290.9	UNICOM 122.8 (CTAF) 0
--------------------------	--	---------------------------------

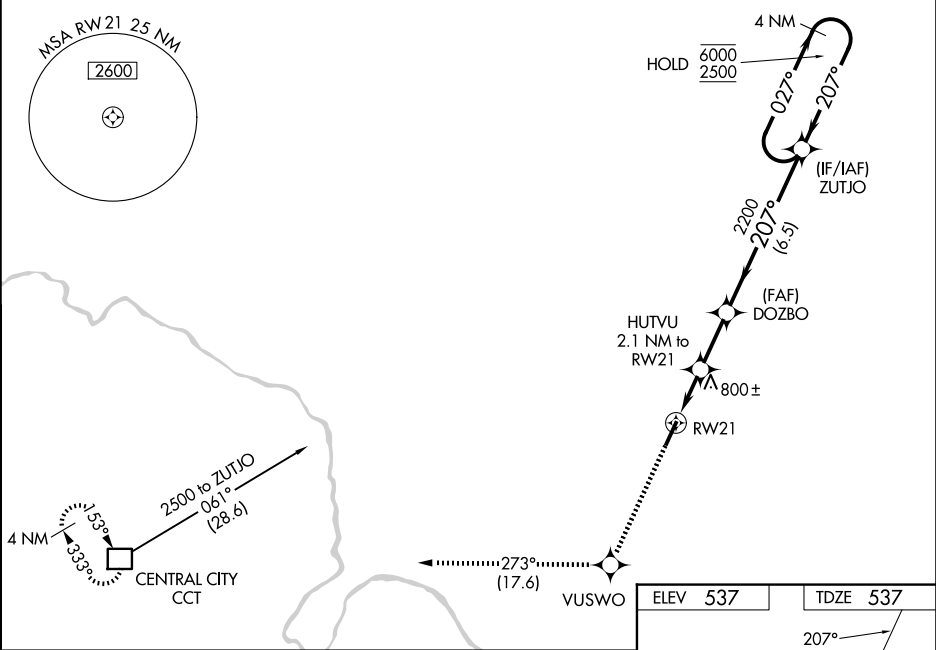

3000

↑

VUSWO

✧

CCT

□

tr 273°

HUTVU

2.1 NM to RW21

DOZBO

2200

ZUTJO

4 NM Holding Pattern

*LNAV only.

RW21

2.1 NM

*1360

2.3 NM

2200

6.5 NM

027° → 6000

← 207° 2500

GP 3.50°

TCH 47

207°

CATEGORY	A		B		C	D
LPV DA	787-1	250 (300-1)	807-1 270 (300-1)		NA	
LNAV/VNAV DA	1011-1⅓		474 (500-1⅓)		NA	
LNAV MDA	1060-1	523 (600-1)	1060-1½ 523 (600-1½)		NA	
CIRCLING	1060-1 523 (600-1)	1100-1 563 (600-1)	1300-2¼ 763 (800-2¼)		NA	

