

WAA5	APP CRS	Rwy ldg	3700
CH 69536	218°	TDZE	354
W22A		Apt Elev	354

RNAV (GPS) RWY 22

WASILLA (IYS) (PAWS)

RNP APCH.


▼

⚠

Circling NA to Rwy 4S and 22S. Baro-VNAV and VDP NA when using Palmer altimeter setting. Rwy 22 helicopter visibility reduction below 3/4 SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -25°C or above 54°C. When local altimeter setting not received, use Palmer altimeter setting and increase all DA 46 feet, MDA 60 feet and all visibilities 1/8 mile.

MISSED APPROACH:
Climb to 1000 then
climbing right turn to
3000 direct BGQ
VORTAC and hold.

AWOS-3P 135.25	ANCHORAGE APP CON 119.1 363.2	CTAF 122.8 0
-------------------	----------------------------------	-----------------

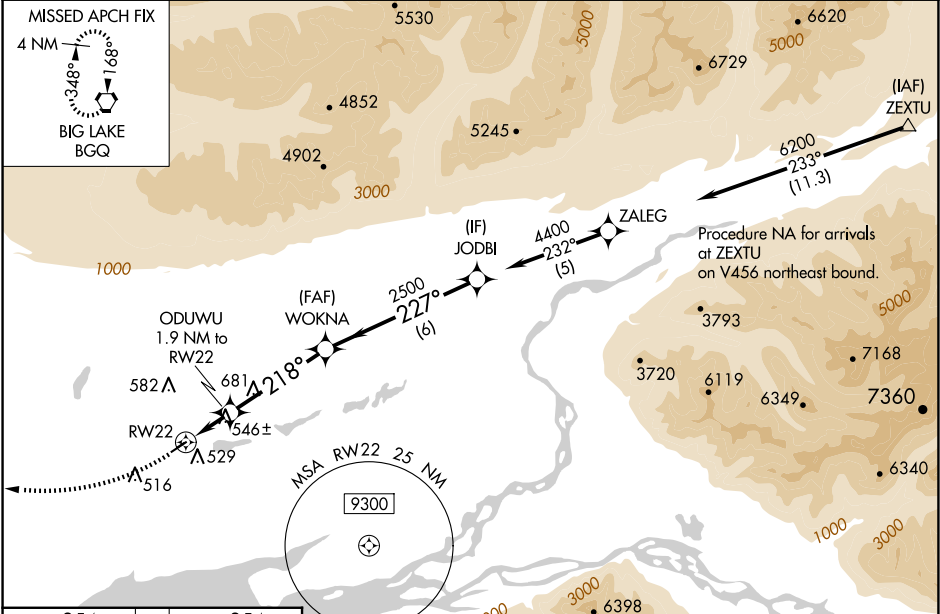

ELEV 354	TDZE 354
----------	----------

1000

3000

BGQ

*LNAV only

ODUWU 1.9 NM to RW22

*1.2 NM to RW22

WOKNA 2500

JODBI 4400

RW22

218°

227°

2500

1060*

GP 3.31°

TCH 40

218°

227°

3700 X.75

0.5% Up

0.4% Up

1690 X.60

MIRL Rwy 4-22 0

REIL Rwy 4 and 22 0

CATEGORY	A	B	C	D
LPV DA	604-3/4	250 (300-3/4)	NA	
LNAV/VNAV DA	821-1 1/2	467 (500-1 1/2)	NA	
LNAV MDA	800-1	446 (500-1)	NA	
CIRCLING	1000-1	646 (700-1)	NA	