

WAAS CH 70633 W34A	APP CRS 339°	Rwy Ldg TDZE 1364 Apt Elev 1368
--	------------------------	---

RNAV (GPS) RWY 34



WADENA MUNI (ADC)

⚠

DME/DME RNP-0.3 NA. VDP and Baro-VNAV NA with Staples altimeter setting. When local altimeter setting not received, use Staples altimeter setting and increase all DA 52 feet and all MDA 60 feet, increase LNAV/VNAV visibility 1/8 mile, LNAV Cat C visibility 1/4 mile and Circling Cat C visibility 1/4 mile. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (1°F) or above 54°C (130°F).

MISSED APPROACH: Climb to 3300 direct WENVI and hold.

AWOS-3PT 118.875	MINNEAPOLIS CENTER 126.1 269.2	GCO 121.725	UNICOM 122.8 (CTAF) 0
----------------------------	--	-----------------------	---------------------------------

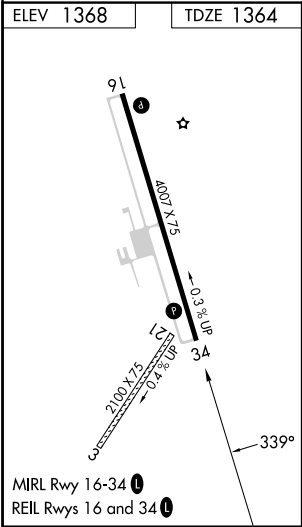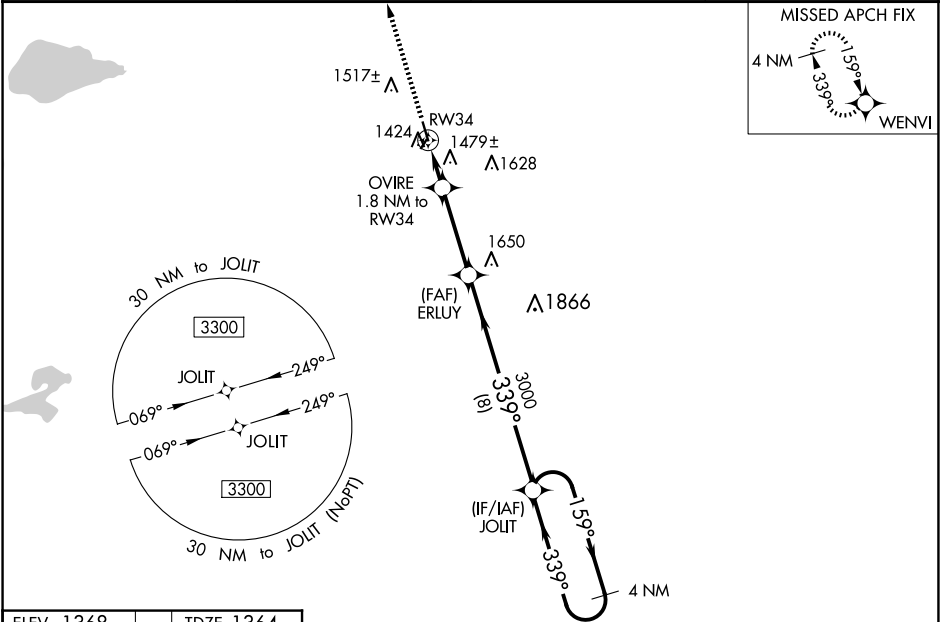

3300	WENVI	OVIRE	ERLUY	JOLIT	4 NM Holding Pattern
↑	✱	1.8 NM to RW34	3000	159° → 3300	
* LNAV only					
✱ 1.1 NM to RW34					
RW34					
1960*					
3000					
GP 3.00° TCH 42					
1.1 NM 0.7 NM 3.2 NM 8 NM					
CATEGORY	A	B	C	D	
LPV DA	1614-1	250 (300-1)		NA	
LNAV/VNAV DA	1791-1½	427 (500-1½)		NA	
LNAV MDA	1740-1	376 (400-1)	1740-1⅛ 376 (400-1⅛)	NA	
CIRCLING	1780-1 412 (500-1)	1820-1 452 (500-1)	1940-1½ 572 (600-1½)	NA	