

WAAS CH 63022 W06A	APP CRS 067°	Rwy Ldg TDZE 665 Apt Elev 665
--	------------------------	---

RNAV (GPS) RWY 6


SANDUSKY COUNTY RGNL (S24)

RNP APCH - GPS.

⚠ Baro-VNAV and VDP NA when using TOL altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use TOL altimeter setting: increase LPV DA to 1008 feet and all visibilities $\frac{3}{8}$ SM; increase LNAV/VNAV DA to 1041 feet and all visibilities $\frac{3}{8}$ SM; increase all MDA 100 feet and LNAV visibility Cat C and D $\frac{3}{8}$ SM and Circling visibility Cat C and D $\frac{1}{2}$ SM.

MISSED APPROACH:
Climb to 3000 direct
OBOZE and hold.

AWOS-3P 119.575	TOLEDO APP CON 126.1 307.0	UNICOM 123.05 (CTAF) 0
---------------------------	--------------------------------------	----------------------------------

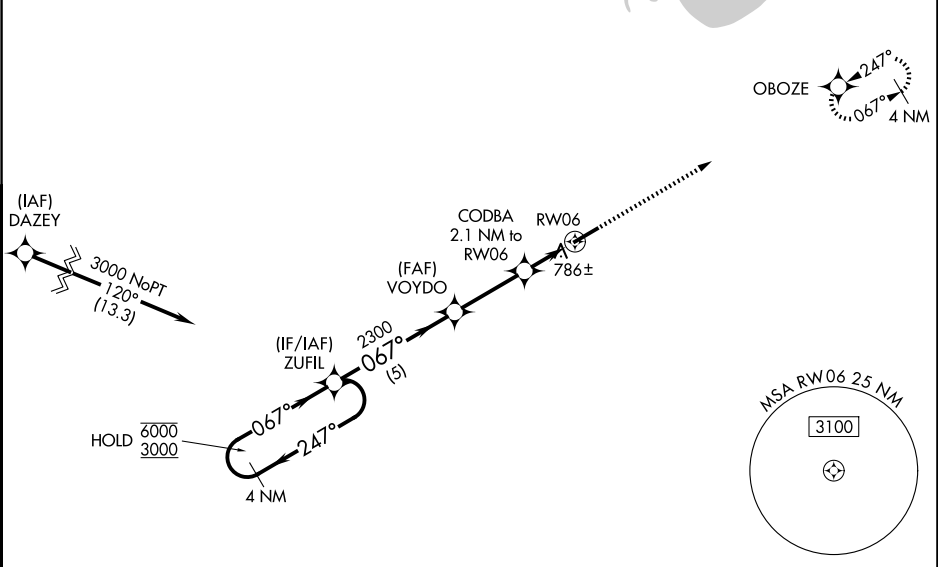

4 NM Holding Pattern					ELEV 665		TDZE 665	
					3000 ↑		OBOZE ✧	
GP 3.00° TCH 44					VOYDO 2300		CODBA 2.1 NM to RW06	
5 NM					2.9 NM		1.1 NM	
CATEGORY					A		B	
LPV DA					915-¾		250 (300-¾)	
LNAV/VNAV DA					948-⅞		283 (300-⅞)	
LNAV MDA					1040-1		375 (400-1)	
CIRCLING					1120-1 455 (500-1)		1160-1 495 (500-1)	
					1380-2 715 (800-2)		1380-2¼ 715 (800-2¼)	
					REIL Rwy 6 and 24		MIRL Rwy 6-24	