

WAAS
CH **86540**
W27A

APP CRS
274°

Rwy Ldg
TDZE **1463**
Apt Elev **1465**

RNAV (GPS) RWY 27

PIKE COUNTY/HATCHER FLD (PBX)

RNP APCH - GPS.

▼

▲


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Rwy 27 helicopter visibility reduction below ¾ SM NA. Circling NA to Rws 2 and 20.

MISSED APPROACH: Climb to 4500 direct CILOM and hold, continue climb-in-hold to 4500.

AWOS-3PT
121.225

INDIANAPOLIS CENTER
126.575 257.85

UNICOM
122.8 (CTAF) 0

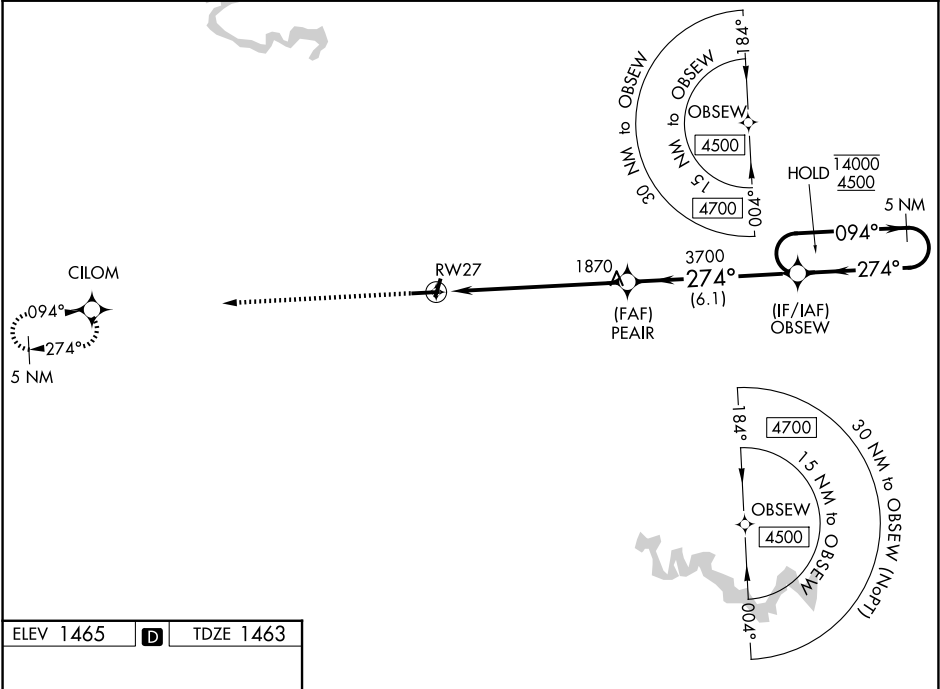

ELEV 1465 TDZE 1463

4500 CILOM

OBSEW 5 NM Holding Pattern

5356 X 100

3455 X 75

27

274°

1.9

5 NM

6.1 NM

PEAIR

3700

274°

3700

094°

14000

4500

GP 3.00°

TCH 47

CATEGORY	A	B	C	D
LPV DA		1722-1	259 (300-1)	
LNAV/VNAV DA		2120-1 ⅞	657 (700-1 ⅞)	
LNAV MDA	2120-1	657 (700-1)	2120-1 ⅞	657 (700-1 ⅞)
CIRCLING	2120-1 655 (700-1)	2180-1 715 (800-1)	2180-2 715 (800-2)	2460-3 995 (1000-3)