

WAAS CH 82206 W15A	APP CRS 147°	Rwy Ldg 11820 TDZE 504 Apt Elev 504
--	------------------------	--

RNAV (GPS) RWY 15
GRIFFISS INTL (RME)


RNP APCH-GPS.

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 48°C.

▲ When local altimeter setting not received, use Syracuse altimeter setting and increase LPV DA to 804 feet, LNAV/VNAV DA to 1152 feet and all MDA 100 feet. Increase LNAV/VNAV all Cats, LNAV Cats C and D and Circling Cats B and C visibility ¼ SM. Baro-VNAV and VDP NA when using Syracuse altimeter setting. Circling NA southwest of Rwy 15-33.

MISSED APPROACH: Climb to 3500 direct BOLTZ and hold.

ATIS 118.7	SYRACUSE APP CON 127.425 290.45	GRIFFISS TOWER ★ 118.1 (CTAF) 0 291.7	GND CON 121.9	UNICOM 122.95
----------------------	---	---	-------------------------	-------------------------

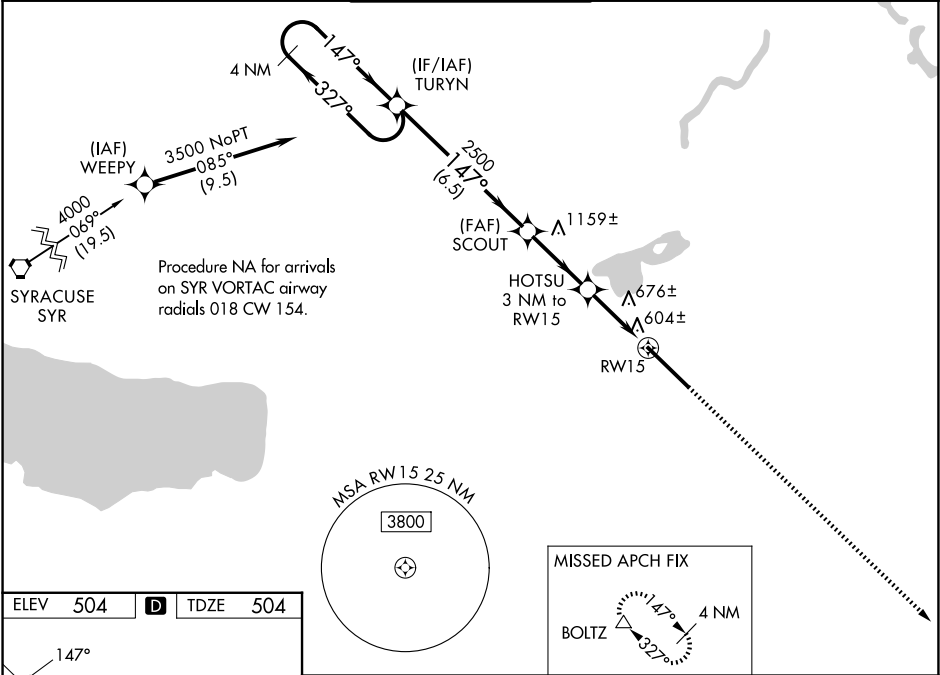

ELEV 504 D TDZE 504

147°

GP 0.3% DOWN

11820 X 200

TWR

AS

33

HIRL Rwy 15-33 0

4 NM Holding Pattern				3500	BOLTZ
TURYN				2500	HOTSU 3 NM to RW15
3500 ← 327°				2500	*1500
147° →				6.5 NM	3 NM
147°				1.8 NM	1.2
GP 3.00° TCH 55				*1.2 NM to RW15	
				RW15	
CATEGORY	A	B	C	D	
LPV DA	704-1			200 (200-1)	
LNAV/VNAV DA	1052-2			548 (600-2)	
LNAV MDA	940-1	436 (500-1)	940-1¼	436 (500-1¼)	940-1½
CIRCLING	1140-1	1260-1	1400-2¾	1640-3	1136 (1200-3)
	636 (700-1)	756 (800-1)	896 (900-2¾)		

NE-2, 02 OCT 2025 to 30 OCT 2025

NE-2, 02 OCT 2025 to 30 OCT 2025