


WAAS CH 45814 W16A	APP CRS 165°	Rwy Idg TDZE 3086 Apt Elev 3086
--	------------------------	---

RNAV (GPS) RWY 16

RONAN (7SØ)

RNP APCH.	▼ NA Baro-VNAV NA when using Missoula altimeter setting. For uncompensated Baro-VNAV systems, procedure NA below -21°C or above 54°C. Circling NA east of Rwy 16-34. When local altimeter setting not received, use Missoula altimeter setting: increase LPV DA to 3550 and LNAV/VNAV DA to 3639 and all visibilities ¼ SM; increase all MDAs 120 feet and LNAV Cat B and Circling Cats A and B visibility ¼ SM. MISSED APPROACH: Climb to 13000 direct IBBOR and on track 255° to HANIM and hold, continue climb-in-hold to 13000.
-----------	--

AWOS-3 119.925	SALT LAKE CITY CENTER 127.075 244.875	AUNICOM 122.8 (CTAF) Ø
--------------------------	---	----------------------------------

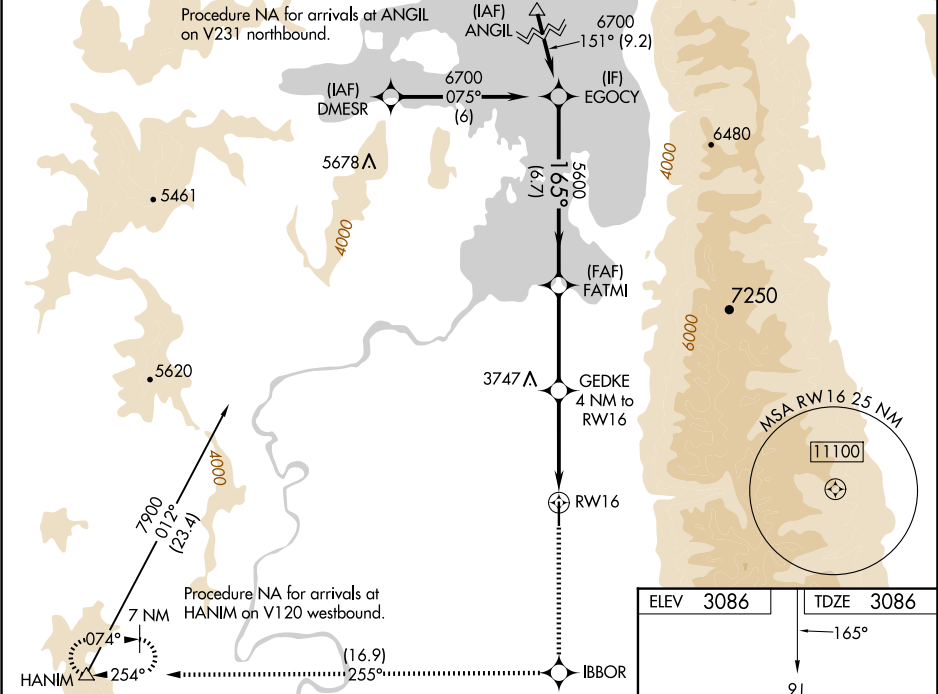

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 21).					13000	IBBOR	tr 255°	HANIM
EGOCY		FATMI						
6700		5600		GEDKE 4 NM to RW16		*LNAV only		
GP 3.00° TCH 40		5600		*4400		RW16		
6.7 NM		3.8 NM		4 NM				
CATEGORY		A	B	C	D			
LPV DA		3443-1¼	357 (400-1¼)			NA		
LNAV/ VNAV DA		3532-1⅜	446 (500-1⅜)			NA		
LNAV MDA		3800-1	714 (800-1)			NA		
CIRCLING		3800-1	714 (800-1)			NA		

