


RNAV (GPS) RWY 20
CHEVAK (VAK)(PAVA)

V For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. Baro-VNAV and VDP NA when using HPB/PAHP altimeter setting. When local altimeter setting not received, use HPB/PAHP altimeter setting and increase LNAV/VNAV DA to 352 feet; increase all MDAs 60 feet and LNAV visibility Cat C/D $\frac{1}{8}$ SM and Circling visibility Cat D $\frac{1}{4}$ SM.

MISSED APPROACH: Climb to 500, then climbing left turn to 3000 direct PEYKI and hold.

CTAF
123.0 **L**

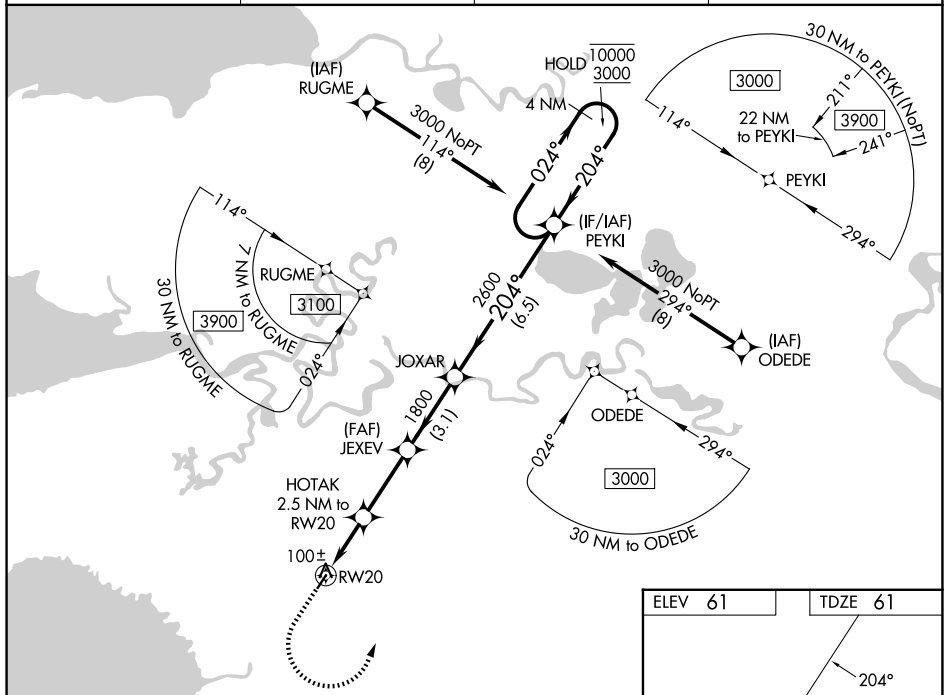

AK, 02 OCT 2025 to 27 NOV 2025

