

WAAS CH 97316 W19A	APP CRS 193°	Rwy Ldg TDZE Apt Elev	6000 488 488
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 19
BEECH RIVER RGNL (PVE)


BEECH RIVER RGNL (PVE)

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5 °F) or above 54 °C (130°F).


A DME/DME RNP-0.3 NA. When local altimeter setting not received, use Jackson altimeter setting: increase LPV all Cats DA to 828 and all Cats visibility ¼ mile; increase LNAV/VNAV all Cats DA to 890 and all Cats visibility ¾ mile; increase all MDA 100 feet and LNAV Cats C/D and Circling Cat C visibility ¼ mile and Circling Cat D visibility ½ mile. VDP and Baro-VNAV NA when using Jackson altimeter setting.

MISSED APPROACH:
Climb to 3000 direct
COCTA and hold.

AWOS-3 118.125	MEMPHIS CENTER 125.85 379.25	UNICOM 123.0 (CTAF) 0
--------------------------	--	---------------------------------

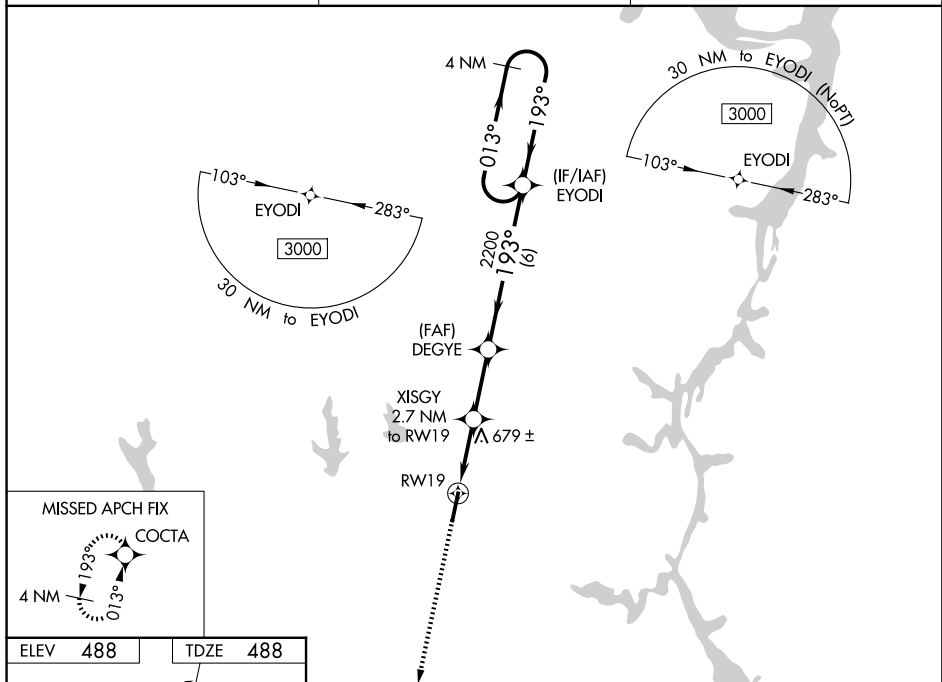

ELEV	488	TDZE	488
------	-----	------	-----

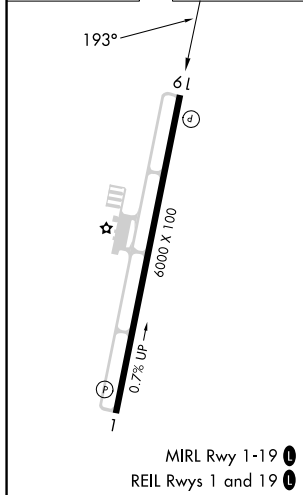

VGS1 and RNAV glidepath not coincident
(VGS1 Angle 3.29/TCH 30).

4 NM Holding Pattern

3000

COCTA

XISGY 2.7 NM to RW19

DEGYE 2200

EYODI

013° →

← 193°

3000

* LNAV only

* 1.2 NM to RW19

RW19

* 1.380

2200

GP 3.00 TCH 40

1.2 NM 1.5 NM 2.6 NM 6 NM

CATEGORY	A	B	C	D
LPV DA	738-7/8		250 (300-%)	
LNAV/VNAV DA	800-1		312 (400-1)	
LNAV MDA	940-1	452 (500-1)	940-1 3/8	452 (500-1 3/8)
CIRCLING	940-1 452 (500-1)	980-1 492 (500-1)	1000-1 1/2 512 (600-1 1/2)	1200-2 1/4 712 (800-2 1/4)