

WAAS CH 69238 W23A	APP CRS 231°	Rwy Idg TDZE Apt Elev	4003 964 964
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 23

SEARCY COUNTY (4A.5)


▼

NA

DME/DME RNP-0.3 NA. Procedure NA at night. Circling NA SE of Rwy 5-23. Baro-VNAV NA. Use Flippin altimeter setting; when not received, use Harrison altimeter setting and increase all Cats LPV DA to 1555 and visibility 1/8 mile, LNAV/VNAV all Cats DA to 2016, and all MDA 60 feet, LNAV Cat B/C and Circling Cat C visibility 1/4 mile. Helicopter visibility reduction below 1 SM NA.

MISSED APPROACH: Climb to 4000 direct MERLS and hold.

FLP AWOS-3 132.075	MEMPHIS CENTER 126.85 281.55	CTAF 122.9 0
------------------------------	--	------------------------

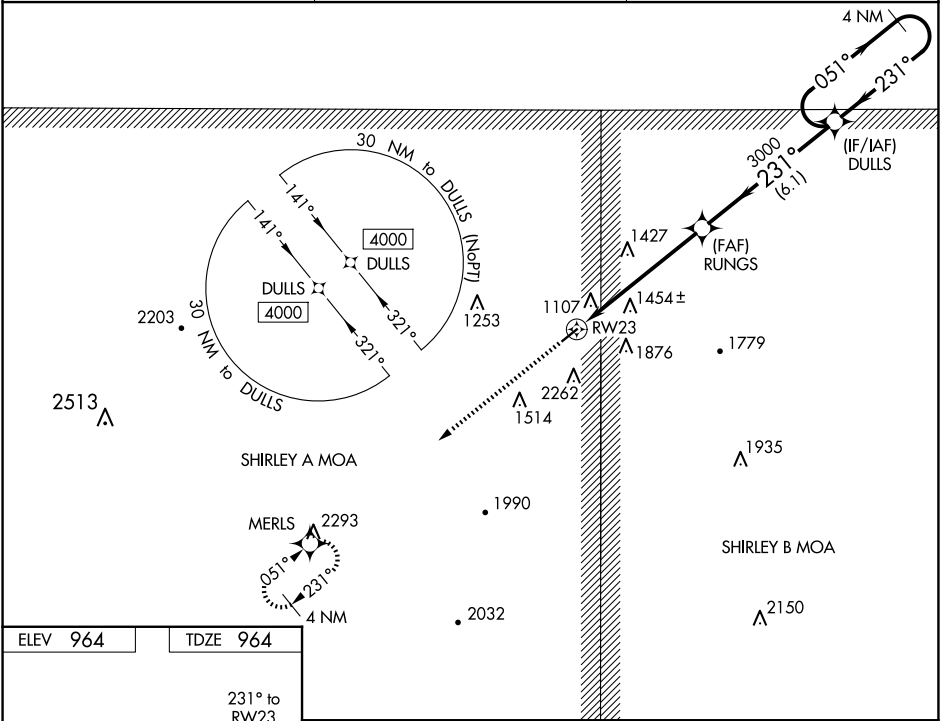

ELEV 964

TDZE 964

4000

MERLS

231° to RW23

4003 x 75

1.0% UP

RUNGS

3000

DULS

4 NM Holding Pattern

051°

231°

4000

GP 3.25°

TCH 44

CATEGORY	A	B	C	D
LPV DA	1512-1¾	548 (600-1¾)		NA
LNAV/VNAV DA	1973-4	1009 (1100-4)		NA
LNAV MDA	1760-1 796 (800-1)	1760-1¼ 796 (800-1¼)	1760-2½ 796 (800-2½)	NA
CIRCLING	1760-1 796 (800-1)	1760-1¼ 796 (800-1¼)	1760-2½ 796 (800-2½)	NA