

WAAS CH 50529 W30A	APP CRS 302°	Rwy Idg 3900 TDZE 2247 Apt Elev 2264
--	------------------------	---

RNAV (GPS) RWY 30
SHER-WOOD (PWD)

RNP APCH-GPS.

T **A** Circling Rwy 8, 26 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. When local altimeter setting not received, use Williston altimeter setting.

MISSED APPROACH: Climb to 2900 then climbing right turn to 5000 direct BEYYA and hold.

AWOS-3PT 135.025	SALT LAKE CENTER 126.85 305.2	UNICOM 122.8 (CTAF) 0
----------------------------	---	---------------------------------

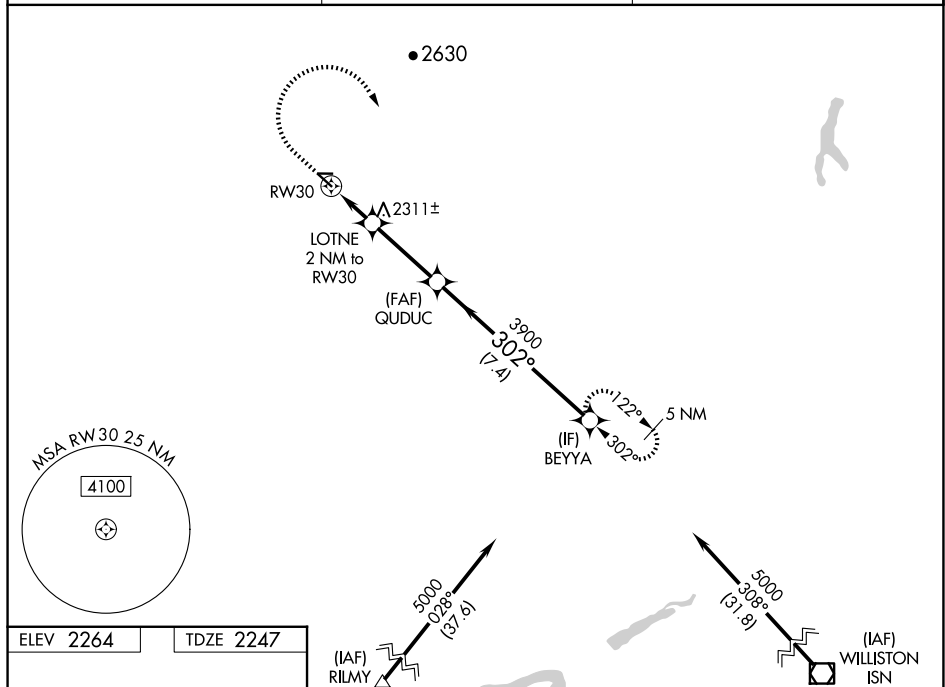


Diagram illustrating the MRL Rwy 12-30 instrumented glidepath. The glidepath is defined by a 302° angle and a 0.4% UP slope. Key points and distances are marked:

- 2900, 5000, 3900 altitudes
- 2951 X 60, 2900 X 75, 3900 X 75 intersections
- 302° angle
- 0.4% UP slope
- GP 3.00° TCH 34