

|                                        |                        |                             |                                           |
|----------------------------------------|------------------------|-----------------------------|-------------------------------------------|
| WAAS<br>CH <b>78209</b><br><b>W20A</b> | APP CRS<br><b>206°</b> | Rwy Ldg<br>TDZE<br>Apt Elev | <b>5500</b><br><b>1020</b><br><b>1028</b> |
|----------------------------------------|------------------------|-----------------------------|-------------------------------------------|

RNAV (GPS) RWY 20



MOREHEAD-ROWAN COUNTY CLYDE A THOMAS RGNL (SYM)

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA when using Mount Sterling altimeter setting. When local altimeter setting not received, use Mount Sterling altimeter setting: increase all DA 50 feet and all MDA 60 feet; increase LPV and LNAV/VNAV all Cats visibility 1⁄8 mile, LNAV Cats C/D visibility 1⁄8 mile, and Circling Cats C/D visibility 1⁄4 mile.

MISSED APPROACH: Climb to 3600 direct CIPUL and hold.

|                         |                                               |                                 |
|-------------------------|-----------------------------------------------|---------------------------------|
| AWOS-3<br><b>119.95</b> | INDIANAPOLIS CENTER<br><b>124.225 360.725</b> | UNICOM<br><b>122.7 (CTAF) 0</b> |
|-------------------------|-----------------------------------------------|---------------------------------|

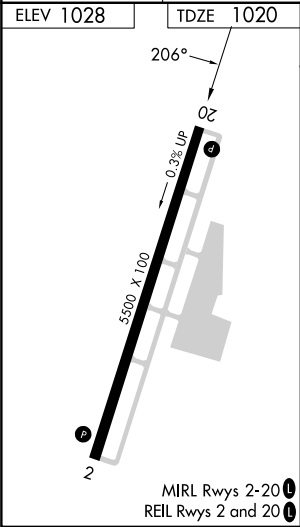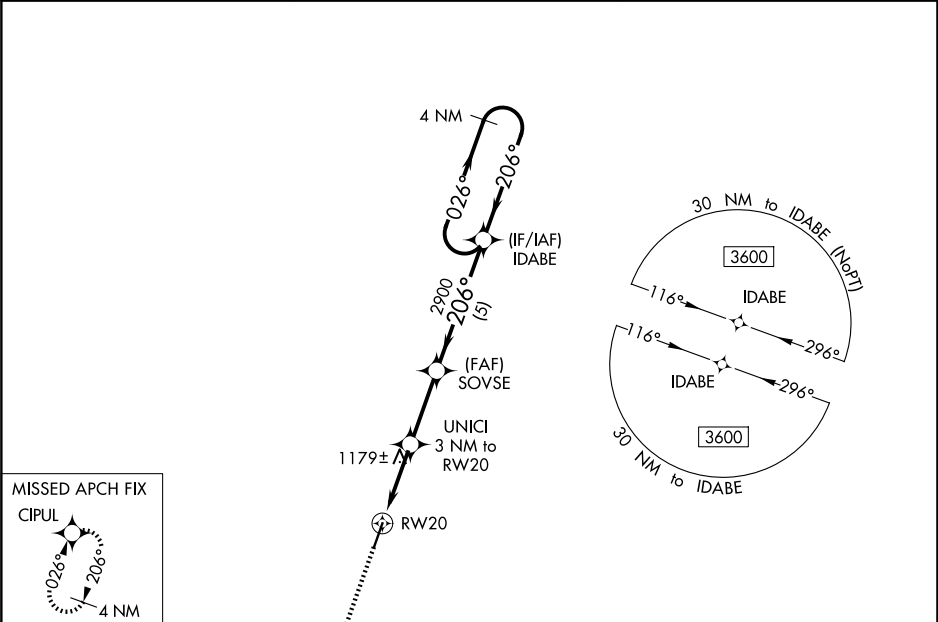

|              |      |        |  |                    |            |                       |                      |                         |                    |
|--------------|------|--------|--|--------------------|------------|-----------------------|----------------------|-------------------------|--------------------|
|              | 3600 | CIPUL  |  |                    |            |                       |                      |                         |                    |
|              |      |        |  | UNICI 3 NM to RW20 | SOVSE 2900 | IDABE                 | 4 NM Holding Pattern |                         |                    |
|              |      |        |  |                    |            |                       | 026° → 3600          |                         |                    |
|              |      |        |  |                    |            |                       | ← 206°               |                         |                    |
|              |      |        |  |                    |            |                       |                      |                         | GP 3.00°<br>TCH 40 |
|              |      |        |  |                    |            |                       |                      |                         |                    |
| CATEGORY     |      | A      |  | B                  |            | C                     |                      | D                       |                    |
| LPV DA       |      |        |  | 1270-7⁄8           |            | 250 (300-7⁄8)         |                      |                         |                    |
| LNAV/VNAV DA |      |        |  | 1453-1½            |            | 433 (500-1½)          |                      |                         |                    |
| LNAV MDA     |      | 1440-1 |  | 420 (500-1)        |            | 1440-1¼               |                      | 420 (500-1¼)            |                    |
| CIRCLING     |      | 1520-1 |  | 492 (500-1)        |            | 1760-2<br>732 (800-2) |                      | 1820-2½<br>792 (700-2½) |                    |

SE-1, 02 OCT 2025 to 30 OCT 2025

SE-1, 02 OCT 2025 to 30 OCT 2025