


WAAS CH 78213 W06A	APP CRS 064°	Rwy Ldg 4000 TDZE 54 Apt Elev 55
--	------------------------	---

RNAV (GPS) RWY 6

ROBERT/BOB/CURTIS MEML (D76) (PFNO)

RNP APCH. ▼ Rwy 6 helicopter visibility reduction below ¾ SM NA. ▲ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C or above 54°C. ⊞ -22°C	MISSED APPROACH: Climb to 4400 direct MABYL and on track 032° to BARGN and hold, continue climb-in-hold to 4400.
--	--

AWOS-3P 120.0	ANCHORAGE CENTER 119.2 263.0	CTAF 122.7 0
-------------------------	--	------------------------

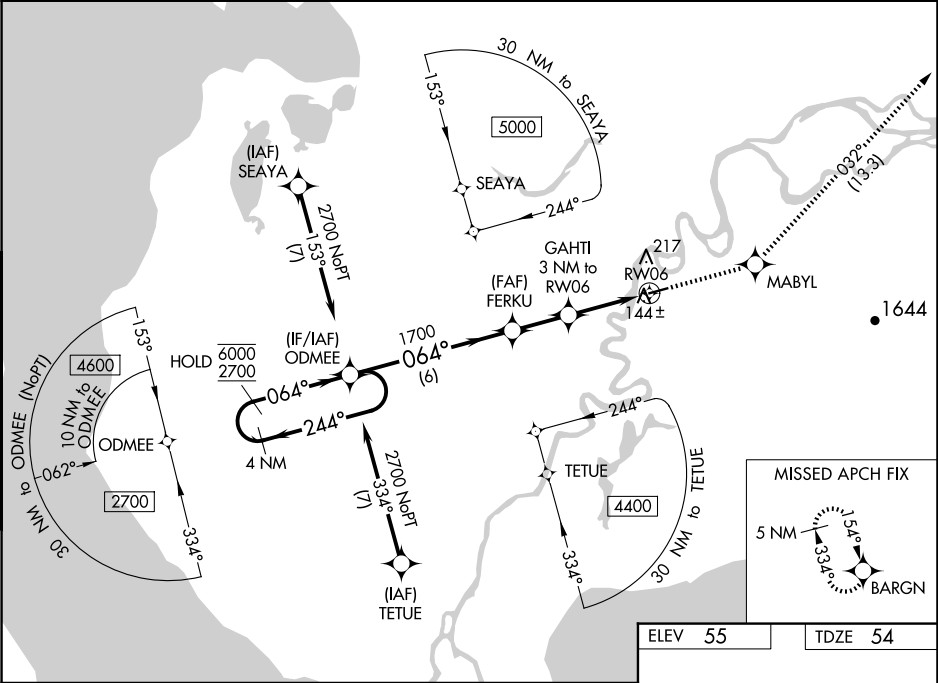

VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 25).				
4 NM Holding Pattern				
6000 ← 244° 2700 → 064°				
GP 3.00° TCH 40				
ODMEE				
FERKU 1700				
*1020				
*LNAV only				
GAHTI 3 NM to RW06				
*1.2 NM to RW06				
1.8 NM				
1.2 NM				
6 NM				
2.1 NM				
CATEGORY	A	B	C	D
LPV DA	304-1 250 (300-1)			
LNAV/VNAV DA	355-1 301 (300-1)			
LNAV MDA	460-1 406 (500-1)		460-1½ 406 (500-1½)	
CIRCLING	520-1 465 (500-1)		520-1½ 465 (500-1½) 760-2¼ 705 (800-2¼)	

