

WAAS CH 93817 W34A	APP CRS 342°	Rwy Ldg 10000 TDZE 62 Apt Elev 69
--	------------------------	--

RNAV (GPS) RWY 34

NORTHWEST FLORIDA BEACHES INTL (E/C/P)



▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Destin altimeter setting and increase all DA 88 feet, increase all MDA 100 feet, increase LPV all Cats visibility ⅓ mile, increase LNAV/VNAV all Cats visibility ⅓ mile, and increase LNAV Cat C and D visibility ⅓ mile. Baro-VNAV and VDP NA with Destin altimeter setting.

MISSED APPROACH: Climb to 4000 direct HOSBY and on track 013° to HUUPP and hold, continue climb-in-hold to 4000.

ATIS 119.975	TYNDALL APP CON★ 125.2	PANAMA CITY TOWER★ 118.95 (CTAF) 0	GND CON 121.65
------------------------	----------------------------------	--	--------------------------

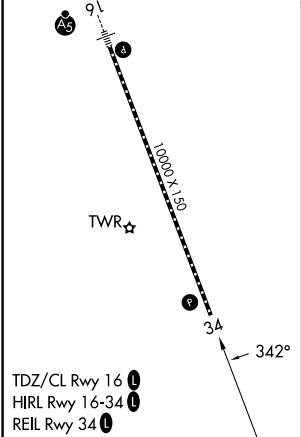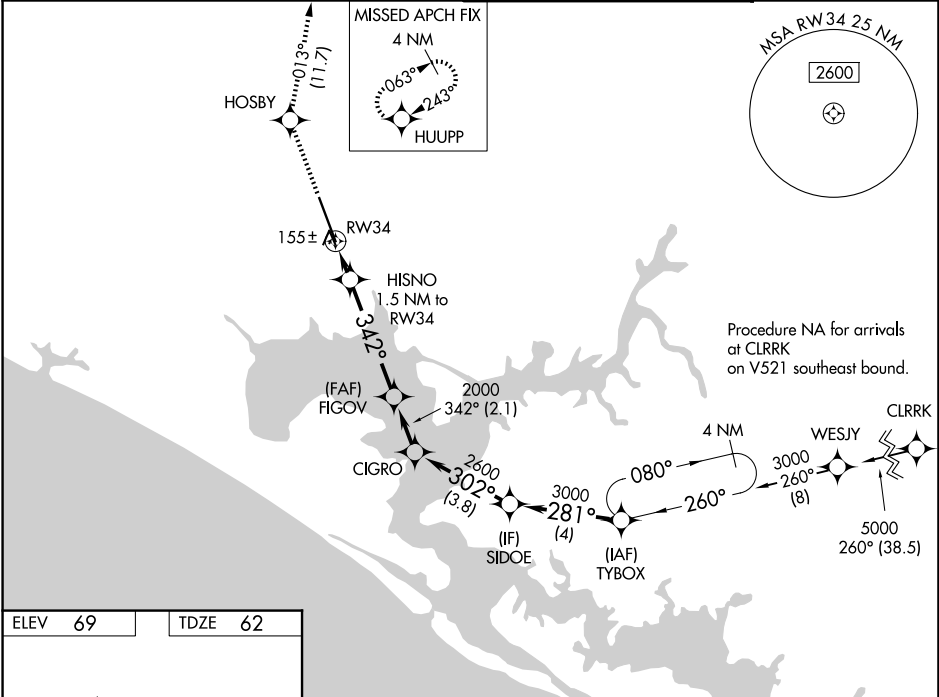

4000	HOSBY	tr 013°	HUUPP	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 86).	
*LNAV only.		HISNO 1.5 NM to RW34	FIGOV 2000	CIGRO 2600	SIDOE 3000
RW34		*0.9 NM to RW34	*580	2000	GP 3.00° TCH 55
0.9		0.6	4.4 NM	2.1 NM	3.8 NM
CATEGORY	A		B	C	D
LPV DA	262-¾		200 (200-¾)		
LNAV/VNAV DA	344-⅞		282 (300-⅞)		
LNAV MDA	420-1		358 (400-1)		
CIRCLING	520-1	451 (500-1)	520-1½ 451 (500-1½)	620-2 551 (600-2)	

SE-3, 02 OCT 2025 to 30 OCT 2025

SE-3, 02 OCT 2025 to 30 OCT 2025