

WAAS CH 69531 W27A	APP CRS 276°	Rwy Ldg TDZE 2036 Apt Elev 2037
--	------------------------	---

RNAV (GPS) RWY 27

POPLAR MUNI (PO1)

⚠

NA

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C (-2°F) or above 54°C (130°F). DME/DME RNP -0.3 NA. When local altimeter setting not received, use Wolf Point altimeter setting: increase LPV DA to 2332, LNAV/VNAV DA to 2582 and all Cats visibility ¼ SM; increase all MDAs 60 feet and Circling Cat C/D visibility ¼ SM. Baro-VNAV and VDP NA with Wolf Point altimeter setting. Helicopter visibility reduction below 1 SM not authorized. Circling NA to Rwy 2/20.

MISSED APPROACH: Climb to 6000 direct ORMOW and on track 246° to DORIA and hold, continue climb-in-hold to 6000.

AWOS-3PT 135.325	SALT LAKE CITY CENTER 126.85 305.2	UNICOM 122.8 (CTAF) 1
----------------------------	--	---------------------------------


MISSED APCH FIX

072°

252°

6 NM

DORIA

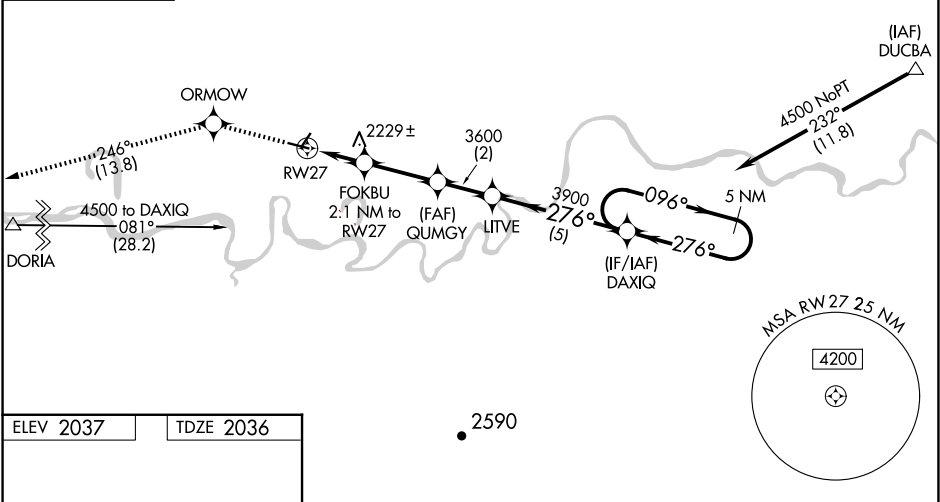

ELEV 2037

TDZE 2036

4403 x 75

2020 x 80

2

276°

MIRL Rwy 9-27 1

6000 ↑	ORMOW ✦	tr 246°	DORIA △	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00°/TCH 24).			
*LNAV only FOKBU 2.1 NM to RW27 GUMGY 3600 *1.3 NM to RW27 RW27 *2740 3600 GP 3.00° TCH 40 5 NM Holding Pattern 096° 276° 4500 276° 276° 1.3 NM 0.8 2.7 NM 2 NM 5 NM				DAXIQ			
				LITVE			
CATEGORY	A			B	C	D	
LPV DA	2286-1			250 (300-1)			
LNAV/VNAV DA	2536-1¾			500 (500-1¾)			
LNAV MDA	2480-1			444 (500-1)	2480-1⅜	444 (500-1⅜)	
CIRCLING	2560-1	2600-1	2600-1	2600-1½	2740-2¼		
	523 (600-1)	563 (600-1)	563 (600-1½)	703 (800-2¼)			

NW-1, 02 OCT 2025 to 30 OCT 2025

NW-1, 02 OCT 2025 to 30 OCT 2025