

WAAS CH 65832 W18A	APP CRS 182°	Rwy Idg TDZE 239 Apt Elev 239
--	------------------------	---

RNAV (GPS) RWY 18


DELTA RGNL (DRP)

RNP APCH - GPS.

Baro-VNAV and VDP NA when using West Memphis altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use West Memphis altimeter setting; increase LPV DA to 507 feet and all visibilities ¼ SM; increase LNAV/VNAV DA to 668 feet and all visibilities ¼ SM; increase all MDAs 80 feet.

MISSED APPROACH: Climb to 3000 direct USUDY and hold, continue climb-in-hold to 3000.

AWOS-3P 120.0	MEMPHIS CENTER 135.3 335.8	UNICOM 123.0 (CTAF) 0
-------------------------	--------------------------------------	---------------------------------

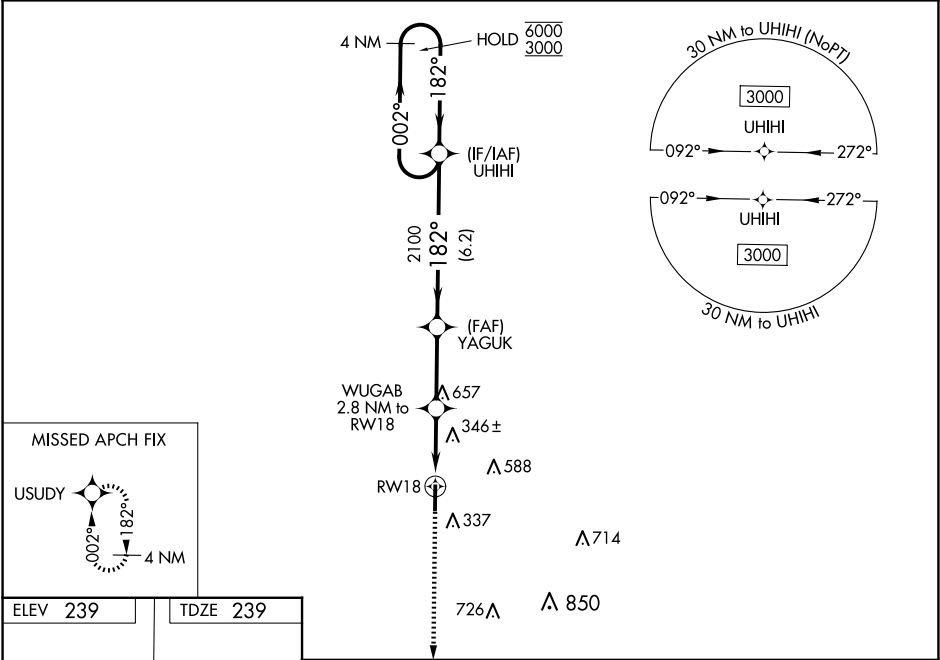

ELEV **239**

TDZE **239**

182°

81

5003 x 75

36

3000

USUDY

4 NM Holding Pattern

UHIHI

002° → 6000

← 182° 3000

GP 3.00° TCH 44

YAGUK 2100

WUGAB 2.8 NM to RW18

1 NM to RW18

1160

2100

1 NM

1.8 NM

2.9 NM

6.2 NM

CATEGORY	A	B	C	D
LPV DA	439-¾	200 (200-¾)	NA	
LNAV/VNAV DA	600-1	361 (400-1)	NA	
LNAV MDA	600-1	361 (400-1)	NA	
C CIRCLING	760-1	521 (600-1)	NA	

HIRL Rwy 18-36 **0**

REIL Rwy 18 & 36 **0**