

WAAS CH 53532 W36A	APP CRS 002°	Rwy Idg 5003 TDZE 235 Apt Elev 239
--	------------------------	---

RNAV (GPS) RWY 36

DELTA RGNL (DRP)

RNP APCH - GPS.



▼

▲

Baro-VNAV and VDP NA when using West Memphis altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use West Memphis altimeter setting; increase LPV DA to 503 feet and all visibilities ½ SM; increase LNAV/VNAV DA to 755 feet; increase all MDAs 80 feet.

MISSED APPROACH: Climb to 3000 direct UH1H and hold, continue climb-in-hold to 3000.

AWOS-3P 120.0	MEMPHIS CENTER 135.3 335.8	UNICOM 123.0 (CTAF) 1
-------------------------	--------------------------------------	---------------------------------

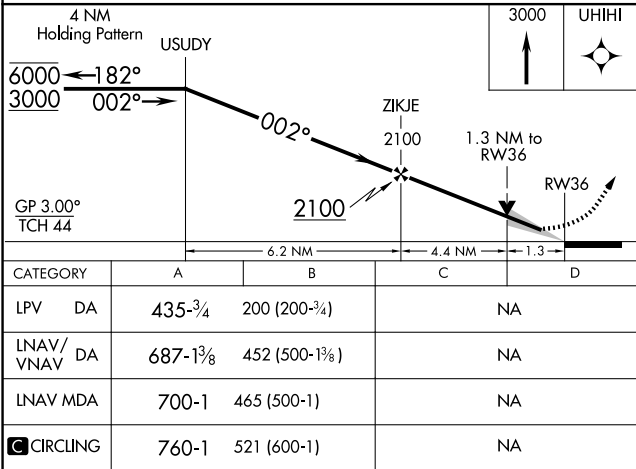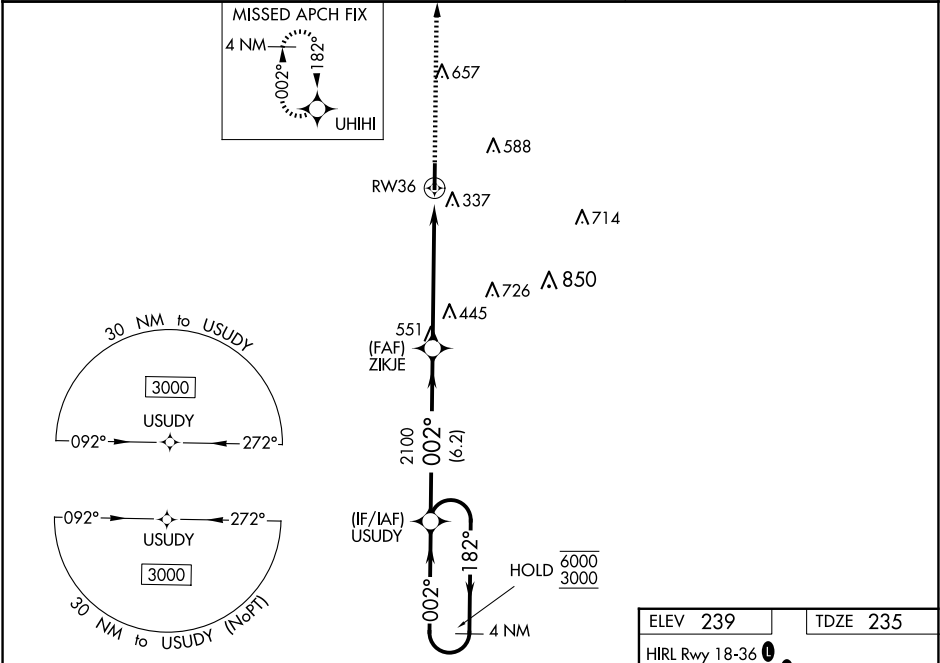

ELEV 239 TDZE 235

HIRL Rwy 18-36 1
REIL Rwy 18 & 36 1

81

5003 X 75

36

002°