

|                                        |                        |                             |                                           |
|----------------------------------------|------------------------|-----------------------------|-------------------------------------------|
| WAAS<br>CH <b>82242</b><br><b>W17A</b> | APP CRS<br><b>173°</b> | Rwy Ldg<br>TDZE<br>Apt Elev | <b>5500</b><br><b>1409</b><br><b>1409</b> |
|----------------------------------------|------------------------|-----------------------------|-------------------------------------------|

RNAV (GPS) RWY 17



SIoux COUNTY RGnL (SXX)

RNP APCH - GPS.

Baro-VNAV and VDP NA when using LRJ altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use LRJ altimeter setting and increase: LPV and LNAV/VNAV DA to 1718 feet and all visibilities ½ SM; increase all MDAs 60 feet and LNAV visibility Cat C/D ½ SM.

MISSED APPROACH: Climb to 4500 direct SKYLE and hold, continue climb-in-hold to 4500.

|                           |                                            |                               |
|---------------------------|--------------------------------------------|-------------------------------|
| AWOS-3P<br><b>120.075</b> | SIoux CITY APP CON ★<br><b>124.6 307.0</b> | UNICOM<br><b>122.7 (CTAF)</b> |
|---------------------------|--------------------------------------------|-------------------------------|

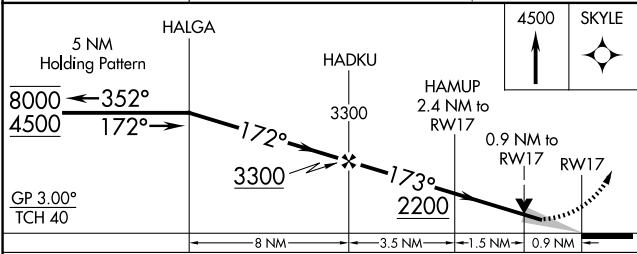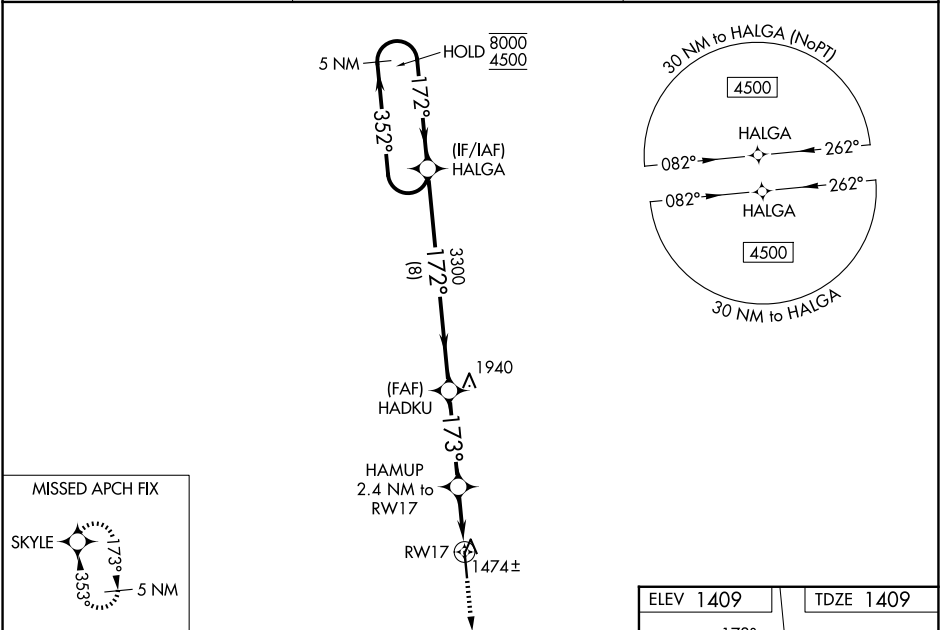

| CATEGORY     | A                  | B                  | C                  | D                    |
|--------------|--------------------|--------------------|--------------------|----------------------|
| LPV DA       |                    | 1659-¾ 250 (300-¾) |                    |                      |
| LNAV/VNAV DA |                    | 1659-¾ 250 (300-¾) |                    |                      |
| LNAV MDA     |                    | 1740-1 331 (400-1) |                    |                      |
| CIRCLING     | 1820-1 411 (500-1) | 2080-1 671 (700-1) | 2080-2 671 (700-2) | 2080-2¼ 671 (700-2¼) |

