

WAAS CH 50347 W35A	APP CRS 347°	Rwy Ldg TDZE 1308 Apt Elev 1309
--	------------------------	---

RNAV (GPS) RWY 35


REDFIELD MUNI (1D8)

RNP APCH - GPS.

Baro-VNAV and VDP NA when using ABR altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter not received, use ABR altimeter setting and increase LPV DA to 1694 feet and all visibilities ½ SM. Increase LNAV/VNAV DA to 1844 feet and all visibilities ½ SM. Increase all MDAs 100 feet.

MISSED APPROACH: Climb to 3400 direct BOTJO and hold.

AWOS-3P 118.525	MINNEAPOLIS CENTER 126.25 339.8	UNICOM 122.8 (CTAF) 0
---------------------------	---	---------------------------------

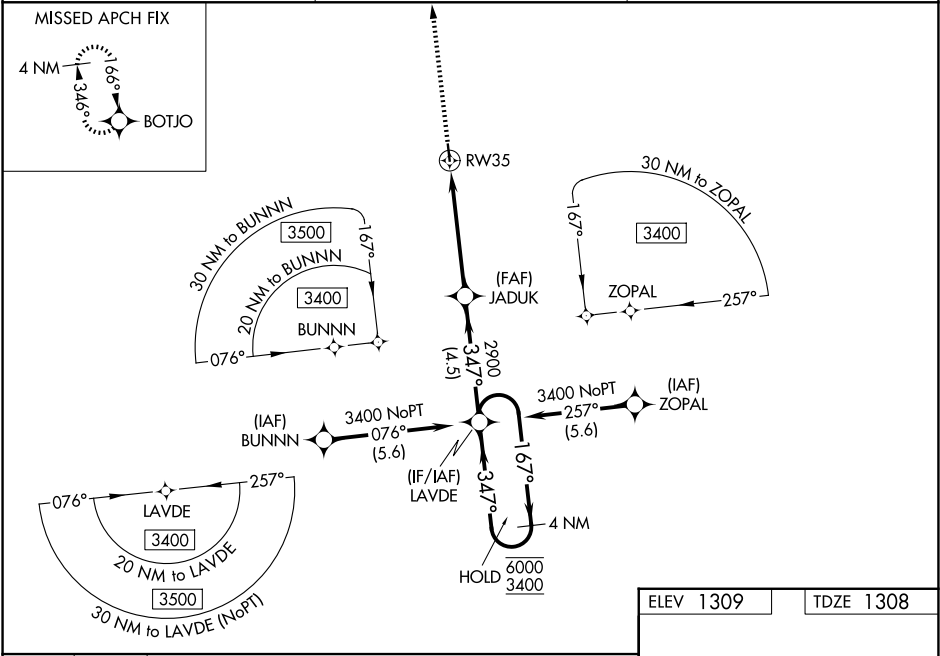

3400

↑

BOTJO

JADUK

2900

1.4 NM to RW35

1.4 NM

3.5 NM

4.5 NM

347°

2900

167° → 6000

← 347° 3400

4 NM Holding Pattern

LAVDE

GP 3.00°

TCH 36

CATEGORY	A	B	C	D
LPV DA	1558-1	250 (300-1)	NA	
LNAV/VNAV DA	1760-1⅓	452 (500-1⅓)	NA	
LNAV MDA	1800-1	492 (500-1)	NA	
CIRCLING	1820-1 511 (600-1)	1900-1 591 (600-1)	NA	

MIRL Rwy 17-35

3500 X 75

35

347°

3400

347°

4 NM Holding Pattern