

LOC/DME I-ABI 110.3 Chan 40	APP CRS 355°	Rwy Ldg TDZE 1719 Apt Elev 1791
---	------------------------	---

ILS or LOC RWY 35R
ABILENE RGNL (ABI)



ADF required. RADAR required for procedure entry at NUGEN.

▼ For inop ALS, increase S-ILS 35R Cat E visibility to RVR 4000, and S-LOC 35R Cat C/D/E visibility to 1½ SM.
▲ NA ** RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR
A5

MISSED APPROACH: Climb to 3300 then climbing right turn to 4000 direct TOMHI LOM/INT/I-ABI 6.8 DME and hold.

ATIS 118.25	ABILENE APP CON 125.0 338.3 (EAST) 127.2 282.3 (WEST)	ABILENE TOWER 120.1 257.8	GND CON 121.7 348.6
-----------------------	---	-------------------------------------	-------------------------------

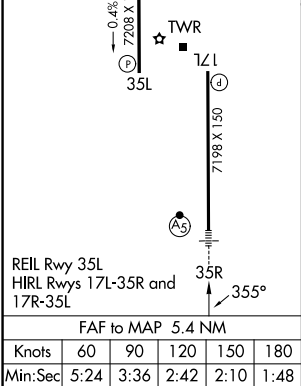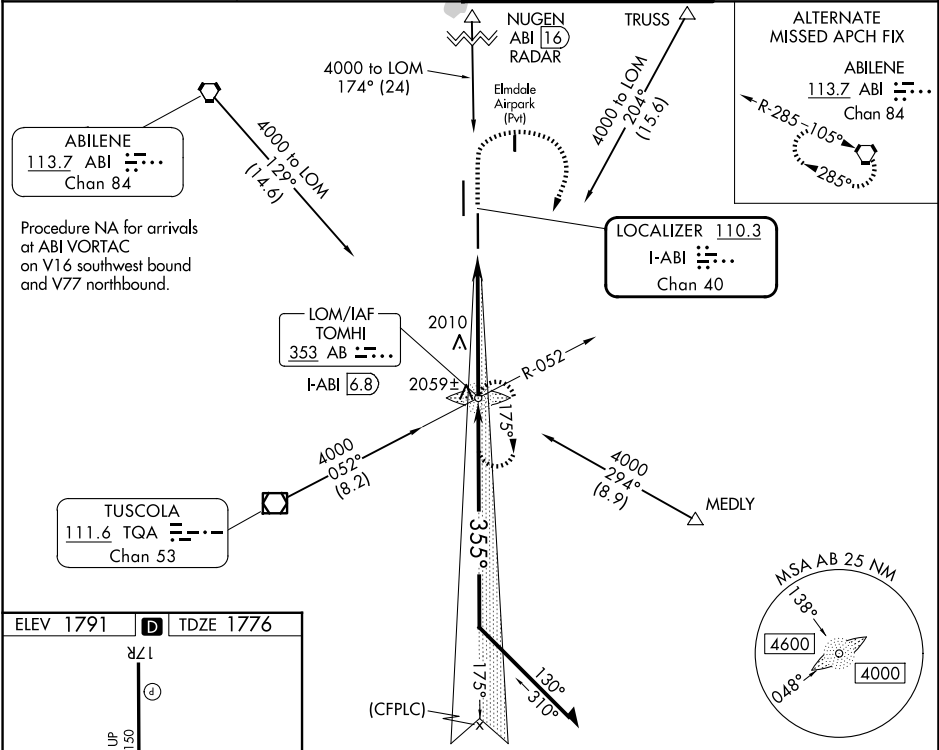

3300 ↑		4000 ↷		TOMHI 		TOMHI LOM/INT I-ABI 6.8		Remain within 15 NM			
*LOC only.						3573		175°		4000	
		I-ABI 1.4		*I-ABI 2.7		355°		3600		GS 3.00° TCH 58	
1.3		4.1 NM									
CATEGORY		A		B		C		D		E	
S-ILS 35R**		1976/24		200 (200-½)							
S-LOC 35R		2260/24 484 (500-½)		2260/50 484 (500-1)							
CIRCLING		2300-1 509 (600-1)		2320-1 529 (600-1)		2420-1¾ 629 (700-1¾)		2460-2 669 (700-2)		2620-3 829 (900-3)	