

LOC/DME 1-CLZ 108.7 Chan 24	APP CRS 223°	Rwy Ldg 7500 TDZE 70 Apt Elev 70
---	------------------------	---


ILS or LOC/DME RWY 22R
BATON ROUGE METRO, RYAN FLD (BTR)

V When local altimeter setting not received, use Hammond altimeter setting and increase all
A DA 91 feet and all MDA 100 feet; increase S-ILS 22R all Cats visibility to RVR 2200; increase
S-LOC 22R Cat C/D visibility to RVR 5000. For inop MALSR when using Hammond altimeter
setting, increase S-ILS 22R all Cats visibility to RVR 4500, and S-LOC 22R Cat C/D visibility to
1½ mile. For inop MALSR, increase S-LOC 22R Cat C/D visibility to RVR 5500.
VDP NA with Hammond altimeter setting.

MALSI

MISSED APPROACH:
Climb to 600 then
climbing right turn to
2000 direct LSU
VORTAC and hold.

ATIS	BATON ROUGE APP CON ★	RYAN TOWER ★	GND CON	CLNC DEL	UNICOM
125.2	120.3 278.3	118.45 (CTAF) 0 257.8	121.9	119.4	122.95

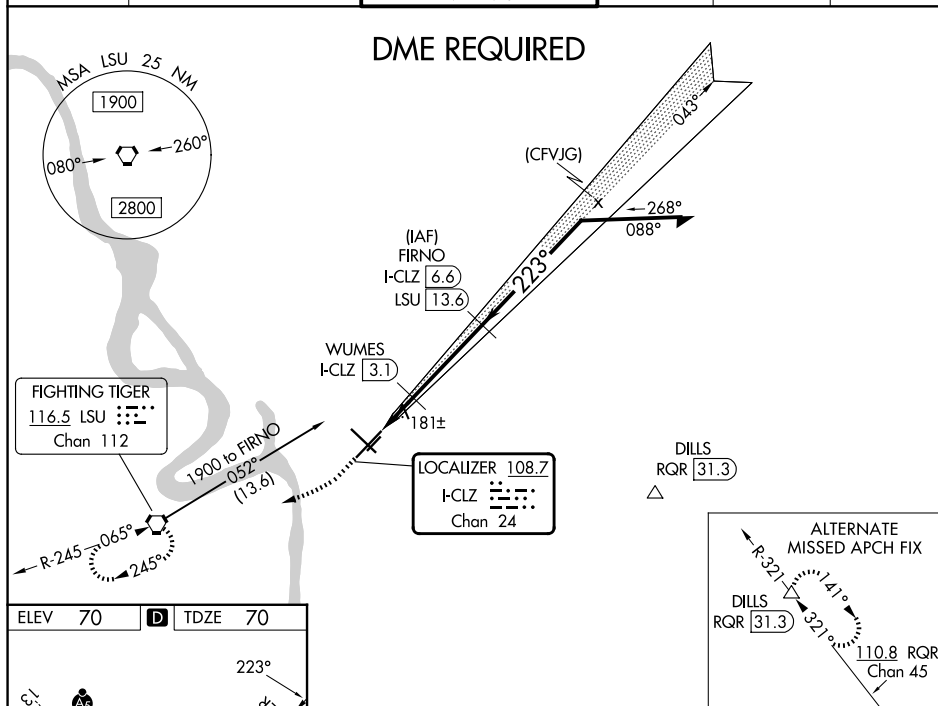

TDZ/CL Rwy 22R
HIRL Rwy 13-31 and 4L-22R
MIRL Rwy 4R-22L

600 ↑	2000 ↗	LSU ⬡				
*LOC only.						
CATEGORY	A	B	C	D		
S-ILS 22R	270/18		200 (200-½)			
S-LOC 22R	440/24	370 (400-½)	440/35	370 (400-½)		
CIRCLING	560-1 490 (500-1)	660-1 590 (600-1)	780-2 710 (800-2)	840-2½ 770 (800-2½)		