

APP CRS
319°

Rwy Ldg
7822

TDZE
439

Apt Elev
459

RNAV (GPS) RWY 32L

SCOTT AFB/MIDAMERICA ST LOUIS (BLV)

RNP APCH-GPS.
For inop ALS, increase LNAV Cat C/D visibility to 1 3⁄8 mile.
ASR

ALSF-1


MISSED APPROACH: Climb to 1500 then climbing left turn to 2400 direct QODCU and hold.

ATIS
128.7 256.7

ST LOUIS APP CON
125.2 281.5

SCOTT TOWER
128.25 253.5


GND CON
119.2 275.8

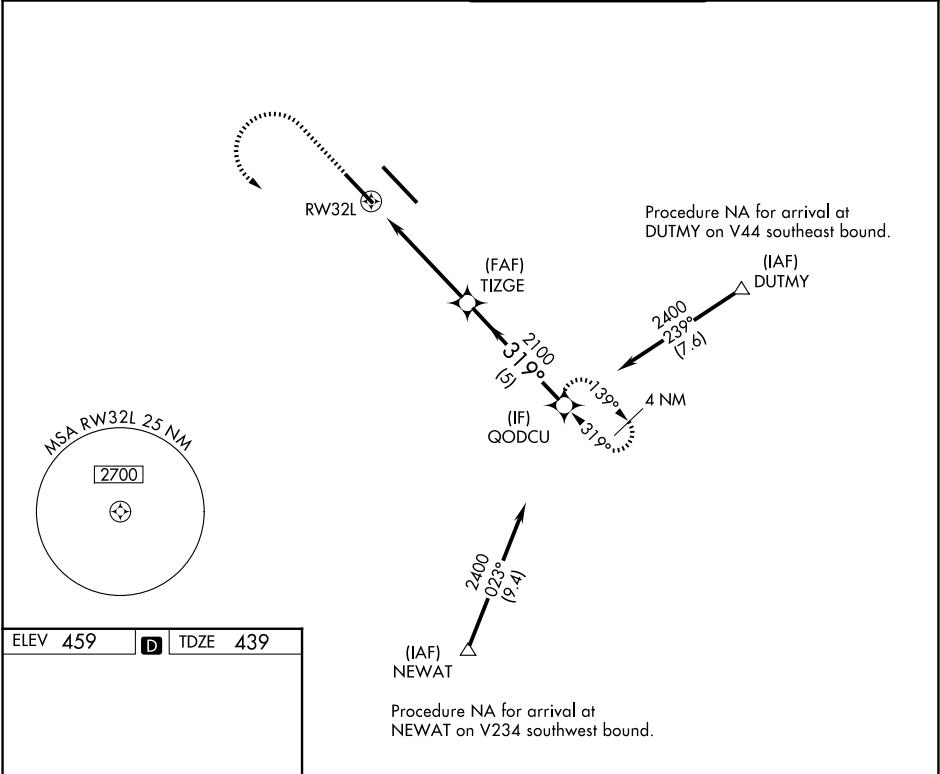

ELEV 459

D

TDZE 439

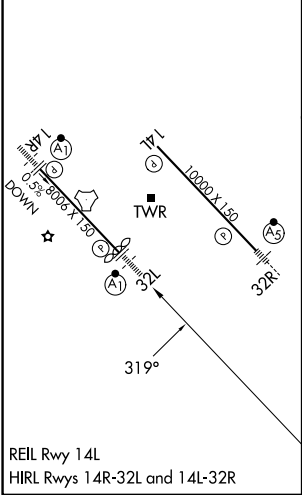

1500	2400	QODCU	VGSi and descent angles not coincident (VGSi Angle 3.00/TCH 50).	
CATEGORY	A	B	C	D
LNAV MDA	920/24	481 (500-½)	920/50	481 (500-1)
CIRCLING	1000-1 541 (600-1)	1120-1 661 (700-1)	1240-2¼ 781 (800-2¼)	1240-2½ 781 (800-2½)