

TACAN SKE	Rwy Ldg	8006
Chan 59	APP CRS	134°
(112.2)	TDZE	459
	Apt Elev	459

TACAN RWY 14R



SCOTT AFB/MIDAMERICA ST LOUIS (BLV)

For inop ALS, increase S-14R Cat E visibility to 1½ SM.


ALSF-1

MISSED APPROACH: Climb to 2400 on SKE R-142 to WOMUG/14.1 DME and hold.

ATIS 128.7 256.7	ST LOUIS APP CON 125.2 281.5	SCOTT TOWER 128.25 253.5	GND CON 119.2 275.8
----------------------------	--	------------------------------------	-------------------------------

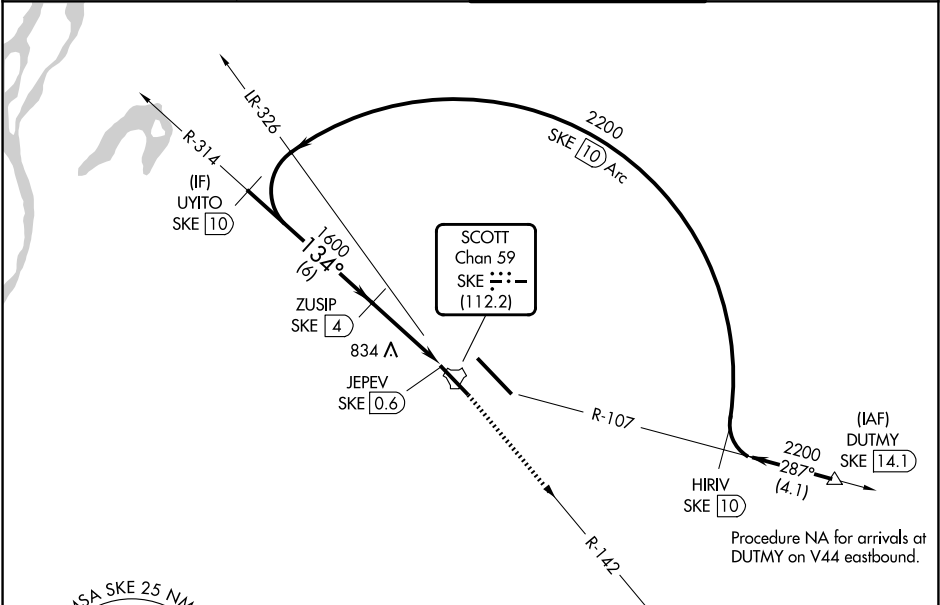

ESA W/IN 100 NM 3500



ELEV 459	D	TDZE 459
----------	----------	----------

UYITO SKE 10

VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 50).

2400

WOMUG SKE 14.1

2200

134°

1600

3.00° TCH 65

JEPEV SKE 0.6

6 NM

1.5 NM

1.9 NM

CATEGORY	A	B	C	D	E
S-14R	1100/24	641 (700-½)	1100-1⅓	641 (700-1⅓)	
CIRCLING	1100-1 641 (700-1)	1120-1 661 (700-1)	1240-2¼ 781 (800-2¼)	1240-2½ 781 (800-2½)	1240-2¾ 781 (800-2¾)

