


WAAS CH 63012 W21A	APP CRS 212°	Rwy Ldg 10165 TDZE 5330 Apt Elev 5344
--	------------------------	--

RNAV (GPS) RWY 21
CASPER/NATRONA COUNTY INTL (CPR)


T For uncompensated Baro-VNAV systems, LNAV/VNAV
A NA below -25°C (-13°F) or above 38°C (100°F).
DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 8100 direct NASOE and right turn via track 302° to FERBI and via track 060° to DDY VOR/DME and hold.

ATIS 126.15	CASPER APP CON ★ 120.65 354.1	CASPER TOWER ★ 118.3 (CTAF) 0 257.8	GND CON 121.9	CLNC DEL 121.9 257.8	UNICOM 122.95
-----------------------	---	---	-------------------------	--------------------------------	-------------------------

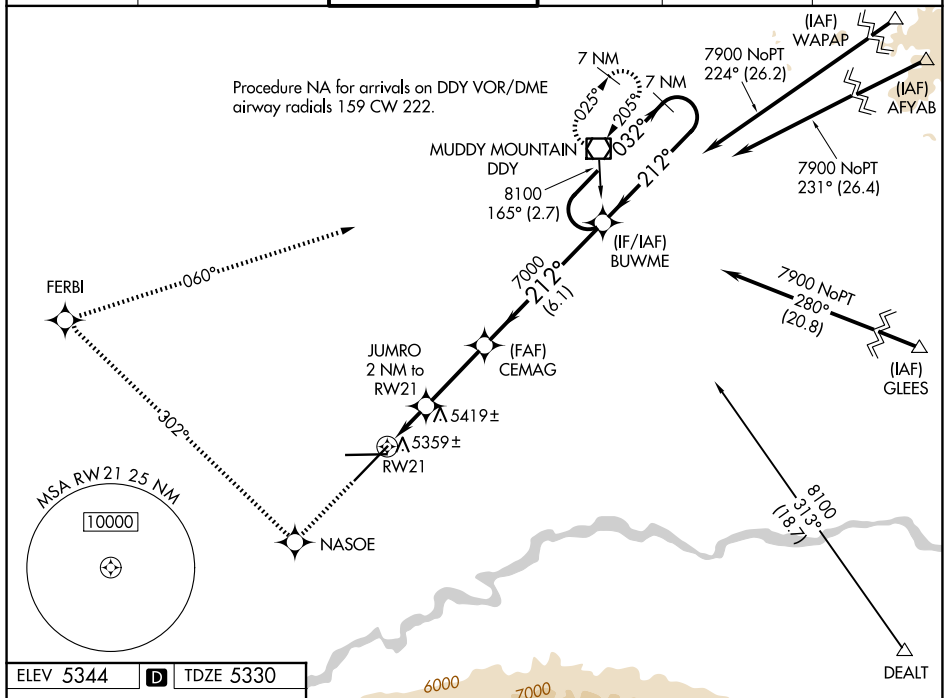

ELEV 5344	D	TDZE 5330
-----------	----------	-----------

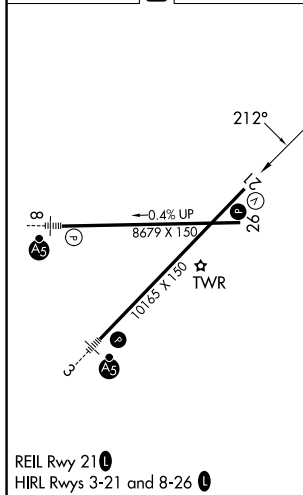

8100 ↑	NASOE ✦	tr 302° ↗	FERBI ✦	tr 060° ↗	DDY ◻	BUWME 7 NM Holding Pattern
*LNAV only		JUMRO 2 NM to RW21	CEMAG			
RW21 ↙		*0.9 NM to RW21	212° ↗		032° →	7900
6020*		7000		GP 3.00° TCH 56		
0.9		1.1 NM	3 NM	6.1 NM		
CATEGORY	A		B	C	D	
LPV DA	5580-3/4		250 (300-3/4)			
LNAV/ VNAV DA	5629-1		299 (300-1)			
LNAV MDA	5680-1 350 (400-1)				5680-1 1/4 350 (400-1 1/4)	
CIRCLING	5780-1 436 (500-1)	5800-1 456 (500-1)	5860-1 1/2 516 (600-1 1/2)	6200-2 3/4 856 (900-2 3/4)		

RNAV (GPS) RWY 21