
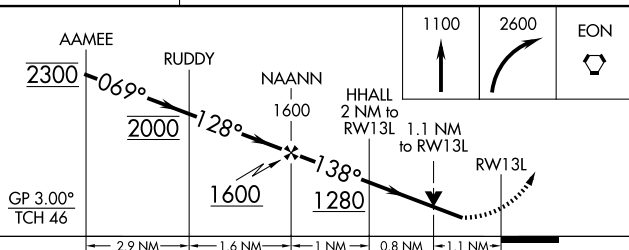


RNAV (GPS) Z RWY 13L
CHICAGO MIDWAY INTL (MDW)


T Rwy 13L helicopter visibility reduction below RVR 4000 NA. For uncompensated
A Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C.

MISSED APPROACH: Climb to 1100 then climbing right turn to 2600 direct EON VORTAC and hold.

D-ATIS 132.75	CHICAGO APP CON 128.2 353.875	MIDWAY TOWER 135.2 269.125	GND CON 118.075	CLNC DEL 124.625	CPDLC
-------------------------	---	--------------------------------------	---------------------------	----------------------------	-------

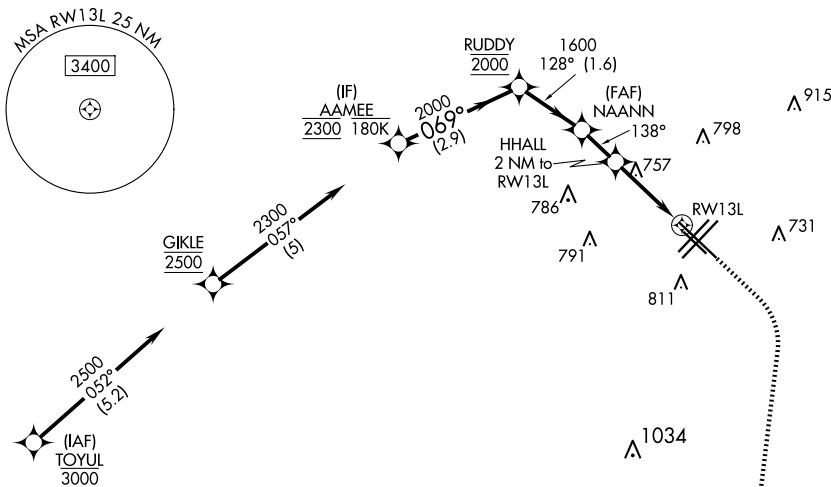

CATEGORY	A	B	C	D
LPV DA	861/40 250 (300-¾)			
LNAV\ VNAV DA	1034-1¼ 423 (500-1¼)			
LNAV MDA	1020/55 409 (400-1)		1020/60 409 (400-1¼)	
 CIRCLING	1120-1 500 (500-1)		1340-2 720 (800-2)	1340-2¼ 720 (800-2¼)

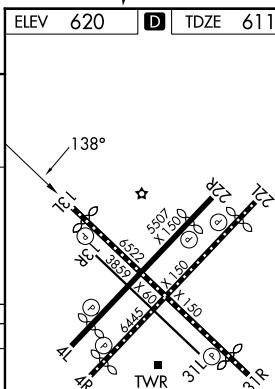

REIL Rwy 4R, 22L and 31R
 RLLS Rwy 13L and 31R
 HIRL Rwy 4R-22L and 13L-31R
 MIRL Rwy 4L-22R and 13R-31L