



LOC I-COS 109.9	APP CRS 352°	Rwy Ldg TDZE Apt Elev	11022 6075 6187
---------------------------	------------------------	-----------------------------	--

ILS or LOC RWY 35L
CITY OF COLORADO SPRINGS MUNI (COS)

ADF required for LOC only.	MALSR 	MISSED APPROACH: Climb to 6700 then climbing right turn to 9000 on heading 047° and BRK VOR/DME R-091 to ADANE INT/BRK 11.1 DME and hold.
 RADAR monitoring required when R-2601 in use. For inop ALS, increase S-LOC 35L Cat C/D visibility to RVR 4500. * RVR 1800 authorized with use of FD or AP or HUD to DA.		

ATIS 125.0 254.3	SPRINGS APP CON 124.0 257.875	SPRINGS TOWER 119.9 360.6	GND CON 121.7 348.6	CLNC DEL 134.45 363.125
----------------------------	---	-------------------------------------	-------------------------------	-----------------------------------

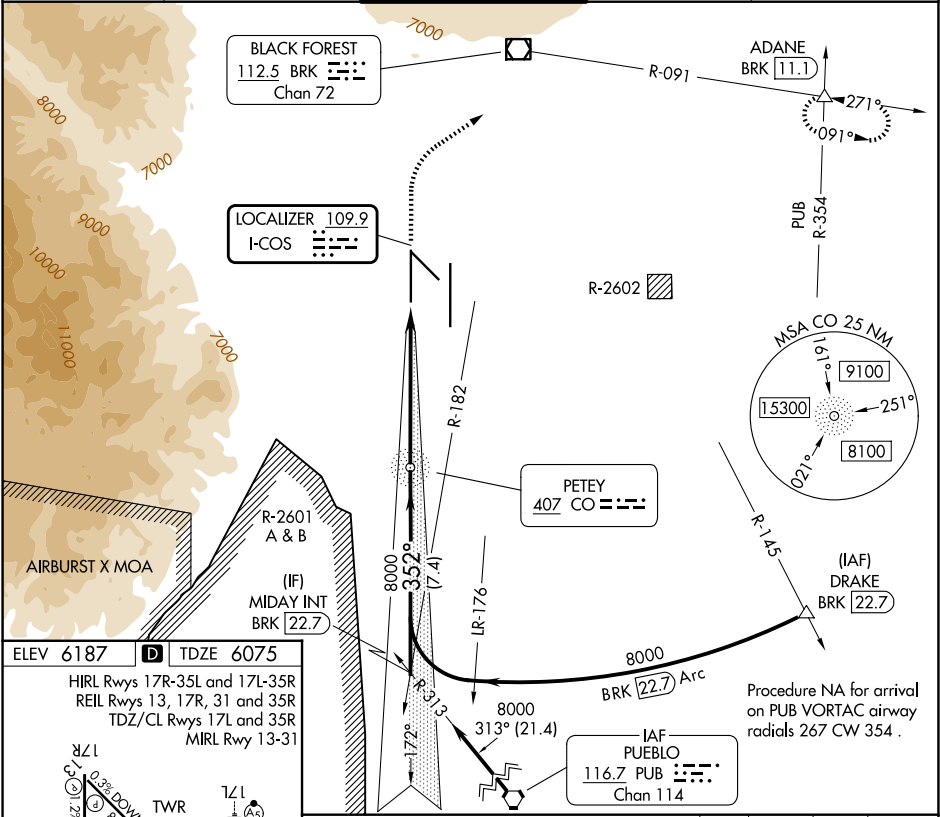

ELEV 6187	D	TDZE 6075
HIRL Rwy 17R-35L and 17L-35R REIL Rwy 13, 17R, 31 and 35R TDZ/CL Rwy 17L and 35R MIRL Rwy 13-31		
		
FAF to MAP 6 NM		
Knots	60	90 120 150 180
Min:Sec	6:00	4:00 3:00 2:24 2:00

MIDAY INT BRK 22.7	CO NDB 7996	6700 ↑	9000 hdg 047°	BRK R-091	ADANE △
VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 72).					
8000 352° 8000					
GS 3.00° TCH 51					
7.4 NM 6 NM					
CATEGORY	A	B	C	D	
S-ILS 35L*	6275/24 200 (100-1/2)				
S-LOC 35L	6340/24 265 (200-1/2)				
CIRCLING	6740-1 553 (600-1)	6760-1 573 (600-1)	6980-2 1/4 793 (800-2 1/4)	7240-3 1053 (1100-3)	

SW-1, 30 OCT 2025 to 27 NOV 2025

SW-1, 30 OCT 2025 to 27 NOV 2025