


WAAS CH 45526 W05A	APP CRS 052°	Rwy Ldg TDZE Apt Elev	7001 228 236
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 5


COLUMBIA METRO (CAE)

RNP APCH - GPS.		MALSR	MISSED APPROACH: Climb to 2400 direct POMIE and on track 018° to BEFTY and hold.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 6000 and LNAV Cats C and D visibility to 1½ SM. *RVR 1800 authorized with use of FD or AP or HUD to DA.			

ATIS	COLUMBIA APP CON		COLUMBIA TOWER	GND CON
120.15	124.15	338.2 (110°-289°)	119.5 257.8	121.9 348.6
	133.4	285.6 (290°-109°)		

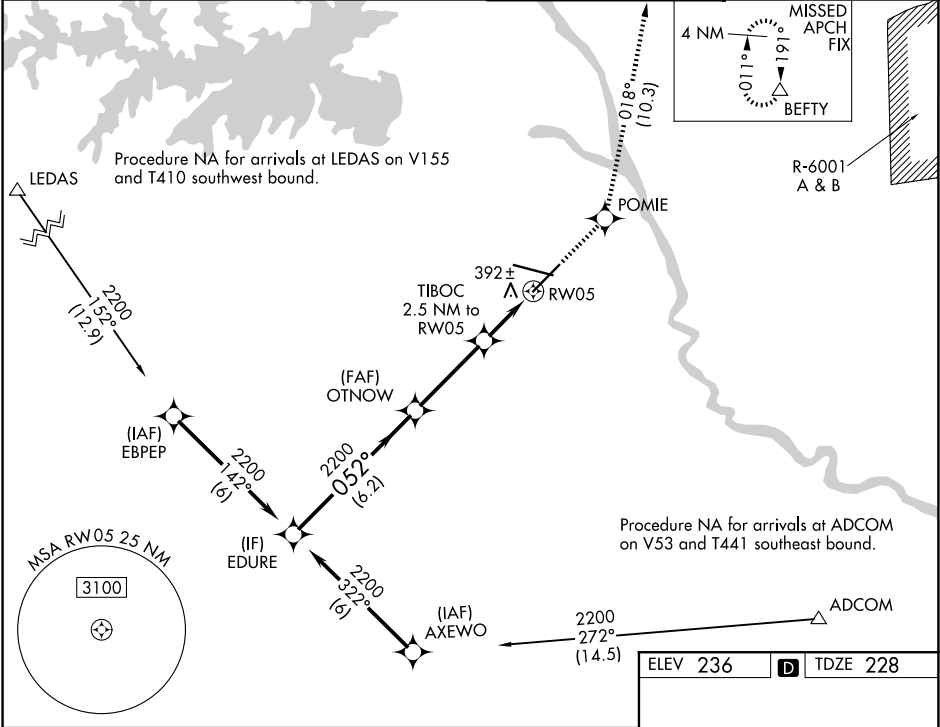

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 73).		2400	POMIE	BEFTY
EDURE		2200	OTNOW	tr 018°
GP 3.00° TCH 60		2200	1080	
6.2 NM		3.5 NM	1.2 NM	1.3 NM
CATEGORY	A	B	C	D
LPV DA*	428/24		200 (200-½)	
LNAV/VNAV DA	638/40		410 (500-¾)	
LNAV MDA	700/24		472 (500-½)	
CIRCLING	740-1 504 (600-1)	860-1 624 (700-1)	1040-2¼ 804 (900-2¼)	1040-2½ 804 (900-2½)

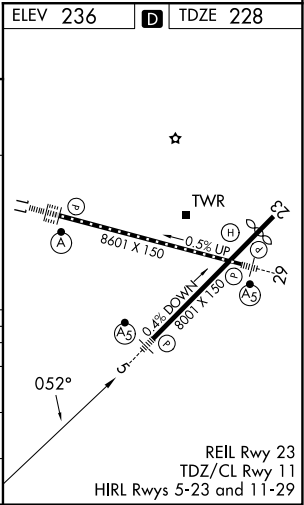

SE-2, 30 OCT 2025 to 27 NOV 2025

SE-2, 30 OCT 2025 to 27 NOV 2025