

APP CRS	Rwy Idg	8000
313°	TDZE	476
	Apt Elev	487

RNAV (RNP) Z RWY 31L


DALLAS LOVE FLD (DAL)

For uncompensated Baro-VNAV systems, procedure NA below -5°C (23°F) or above 48°C (119°F). Simultaneous approach authorized. GPS required. Use of FD or AP providing RNAV track guidance required during simultaneous operations. For inop MALSR, increase RNP 0.30 visibility all Cats to 2½ miles.


MALSR

MISSED APPROACH: Climb to 1700 then climbing right turn to 4000 direct TADDI and hold.

D-ATIS 120.15	LONE STAR APP CON NORTH 124.3 282.275 SOUTH 125.2 343.65	LOVE TOWER 123.7 239.3	GND CON 121.75 348.6	CLNC DEL 127.9	CPDLC
------------------	--	---------------------------	-------------------------	-------------------	-------

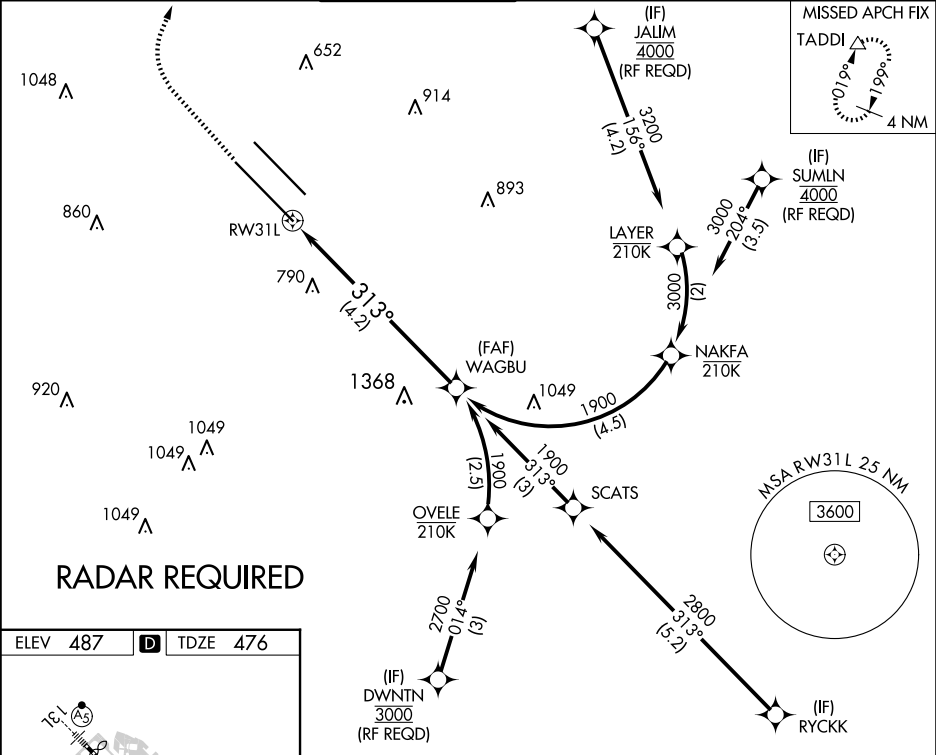

ELEV 487	D	TDZE 476
----------	---	----------

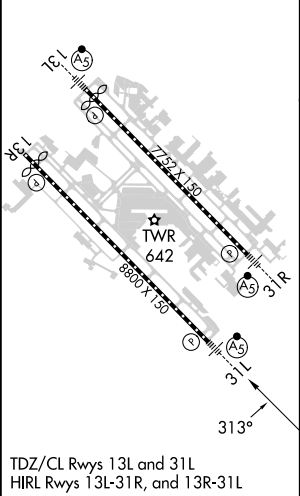

1700 4000 TADDI See planview for multiple IF locations.

CATEGORY	A	B	C	D
RNP 0.30 DA	1117-15%	641 (700-15%)		

AUTHORIZATION REQUIRED