

DAYTON, OHIO

ILS or LOC RWY 23R

WRIGHT-PATTERSON AFB (KFFO)


LOC I-FFO <u>109.7</u>	APCH CRS 233°	Rwy Idg 12,600 THRE 823 Arpt Elev 823
----------------------------------	-------------------------	--

[USAF]


DME or RADAR required for Localizer.		ALSF-1 	† MISSED APPROACH: Climb via FFO R-233 to 2000, at 3 DME turn left direct CLACK to 3000 and hold.
▼ *When ALS inop, increase RVR to 40 and vis to ¾ mile. **When ALS inop, increase CAT AB RVR to 55 and vis to 1 mile, CAT CDE vis to 1¾ miles.	ATIS 124.475 269.9	COLUMBUS APP CON 118.85 269.275	PATTERSON TOWER 127.8 281.45
		GND CON 121.8 335.8	

*** When Rwy 23R VGSi inop, circling
to Rwy 23R NA at night.
Autocoupled approach NA below 1458' MSL.


† Missed approach requires use of RNAV or ATC radar monitoring.

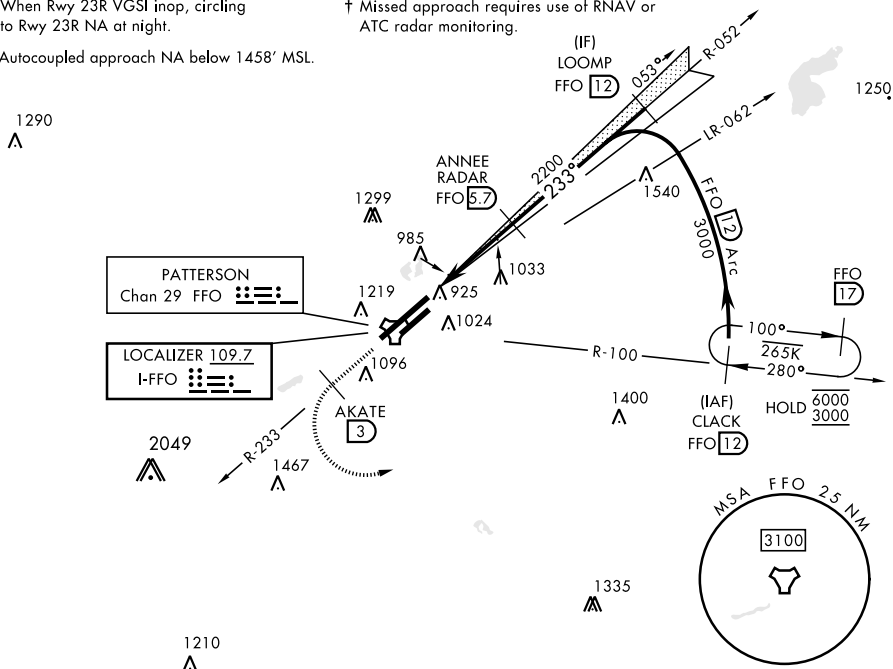

EMERG SAFE ALT 100 NM 3700

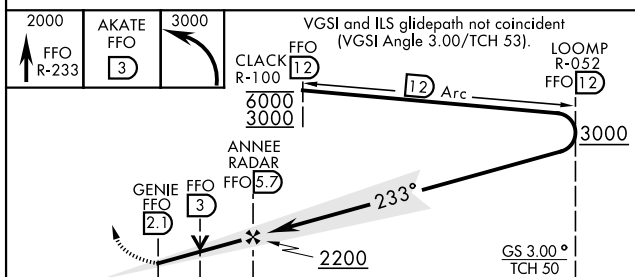

	0.5 NM		→ 3.6 NM →					
CATEGORY	A		B		C	D	E	
S-ILS 23R *	1023/24		200		(200-½)			
S-LOC 23R**	1320/24 497 (500-½)		1320/50 497 (500-1)					
C CIRCLING***	1380-1 557 (600-1)	1440-1 617 (600-1)	1560-2 737 (800-2)	1620-2½ 797 (800-2½)	1620-2¾ 797 (800-2¾)			

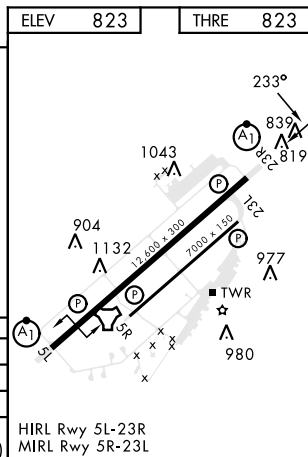

DAYTON, OHIO
Amdt 7 10AUG23

39° 50'N-84° 03'W

WRIGHT-PATTERSON AFB (KFFO)

ILS or LOC RWY 23R