

|           |         |          |      |
|-----------|---------|----------|------|
| LOC I-UEK | APP CRS | Rwy Ldg  | 7401 |
| 109.1     | 062°    | TDZE     | 944  |
|           |         | Apt Elev | 955  |

ILS or LOC RWY 6

ELMIRA/CORNING RGNL (ELM)

⚠

⚠

-21°C


RADAR required to define JOKEN, CONAC. RNAV 1-GPS required for procedure entry. RNAV 1-GPS required from MAP to IREKE.

Inop table does not apply to S-LOC 6 Cats C/D. Circling NA to Rwy's 5 and 23. Circling NA for Cat D south of Rwy's 10 and 28. Circling Rwy 10 NA at night. For inop ALS, increase S-LOC 6 CONAC fix minimums Cats C/D visibility to 2½ SM. \*\* RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH:  
Climb to 4000 direct IREKE/RADAR and hold.

|         |                  |                      |         |          |        |
|---------|------------------|----------------------|---------|----------|--------|
| ATIS    | ELMIRA APP CON ★ | ELMIRA TOWER ★       | GND CON | CLNC DEL | UNICOM |
| 125.475 | 128.425 257.8    | 121.1 (CTAF) 0 257.8 | 121.9   | 121.9    | 122.95 |

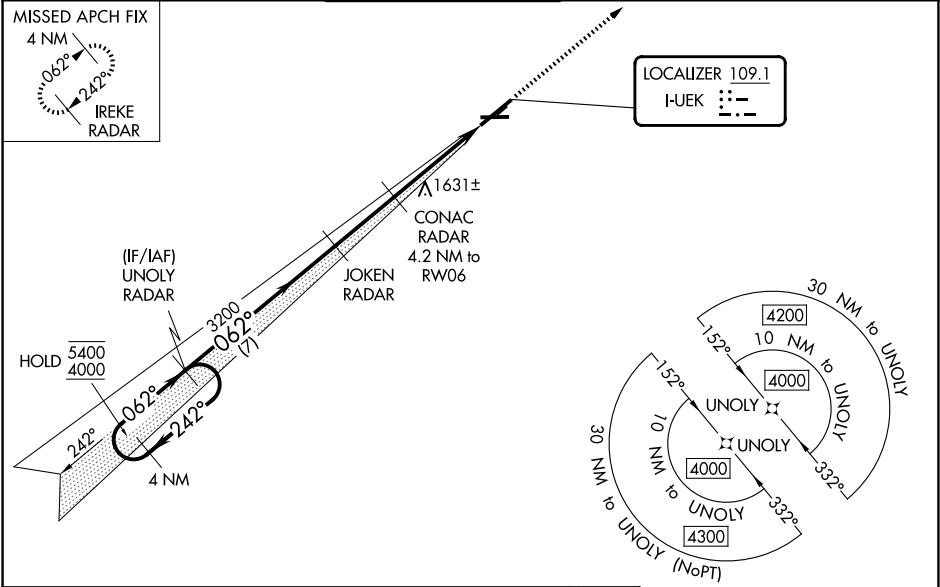

4 NM Holding Pattern

UNOLY RADAR

JOKEN RADAR

CONAC RADAR 4.2 NM to RW06

IREKE RADAR

↑ 4000

GS 3.00° TCH 52

5400 4000

242° 062°

3200

\*2080

7 NM 2.7 NM 4.2 NM

\* LOC only

\* 2160 when using Penn Yan altimeter setting.

ELEV 955

D

TDZE 944

HIRL Rwy 6-24

MIRL Rwy 10-28

REIL Rwy's 6 and 24

TWR

800 X 150

2016 X 150 N

5404 X 150

062°

| CATEGORY           | A                         | B                        | C                       | D                       |
|--------------------|---------------------------|--------------------------|-------------------------|-------------------------|
| S-ILS 6 **         | 1144/24 200 (200-½)       |                          |                         |                         |
| S-LOC 6            | 2080/40<br>1136 (1200-¾)  | 2080/55<br>1136 (1200-1) | 2080-3                  | 1136 (1200-3)           |
| CIRCLING           | 2080-1¼<br>1125 (1200-1¼) | 2080-1½                  | 2100-3<br>1145 (1200-3) | 2340-3<br>1385 (1400-3) |
| CONAC FIX MINIMUMS |                           |                          |                         |                         |
| S-LOC 6            | 1740/24<br>796 (800-½)    | 1740/40<br>796 (800-¾)   | 1740-1¾                 | 796 (800-1¼)            |
| CIRCLING           | 2020-1¼<br>1065 (1100-1¼) | 2080-1½                  | 2100-3<br>1145 (1200-3) | 2340-3<br>1385 (1400-3) |

FAF to MAP 6.9 NM

|         |      |      |      |      |      |
|---------|------|------|------|------|------|
| Knots   | 60   | 90   | 120  | 150  | 180  |
| Min:Sec | 6:54 | 4:36 | 3:27 | 2:46 | 2:18 |