


APP CRS	Rwy Ldg	9025
085°	TDZE	3940
	Apt Elev	3962

RNAV (RNP) Y RWY 8R

EL PASO INTL (ELP)

RNP AR APCH. RF required.		MISSED APPROACH: Climb to 4400 then climbing right turn to 7500 direct FABAN and hold.
T ASR	For uncompensated Baro-VNAV systems, procedure NA below -5°C or above 54°C.	

D-ATIS	EL PASO APP CON	EL PASO TOWER	GND CON	CLNC DEL
120.0 254.3	124.25 298.85	118.3 239.275	121.9 348.6	125.0 379.1

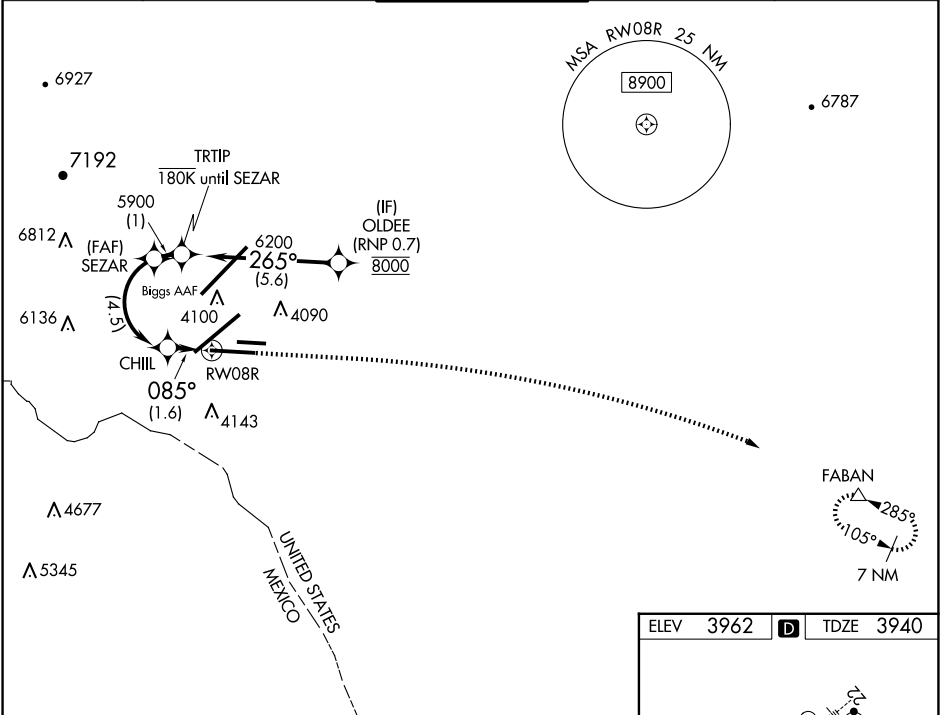

VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 75).				4400	7500	FABAN
				↑	↗	△
OLDEE				TRTIP	SEZAR	CHILL
8000				6200	5900	4477
GP 3.00° TCH 50				5900	4477	RW08R
5.6 NM				1 NM	4.5 NM	1.6 NM
CATEGORY	A	B	C	D		
RNP 0.20 DA	4193-¾		253 (300-¾)			
RNP 0.30 DA	4234-⅞		294 (300-⅞)			
AUTHORIZATION REQUIRED						

