

WAAS CH 70710 W09A	APP CRS 092°	Rwy Ldg TDZE 147 Apt Elev 147
--	------------------------	---

RNAV (GPS) RWY 9

FLORENCE RGNL (F'L.O)

RNP APCH - GPS.


Florescence

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C or above 54°C. Circling Rwy 1, 19 NA at night.

MALSR

MISSED APPROACH: Climb to 2000 direct ESVAC and hold.

ATIS 123.625	FLORENCE APP CON★ 118.6 341.7 (256°-074°) 135.25 316.15 (075°-255°)	FLORENCE TOWER★ 125.1 (CTAF) 0 353.85	GND CON 121.9 353.85	UNICOM 122.95
------------------------	---	--	--------------------------------	-------------------------

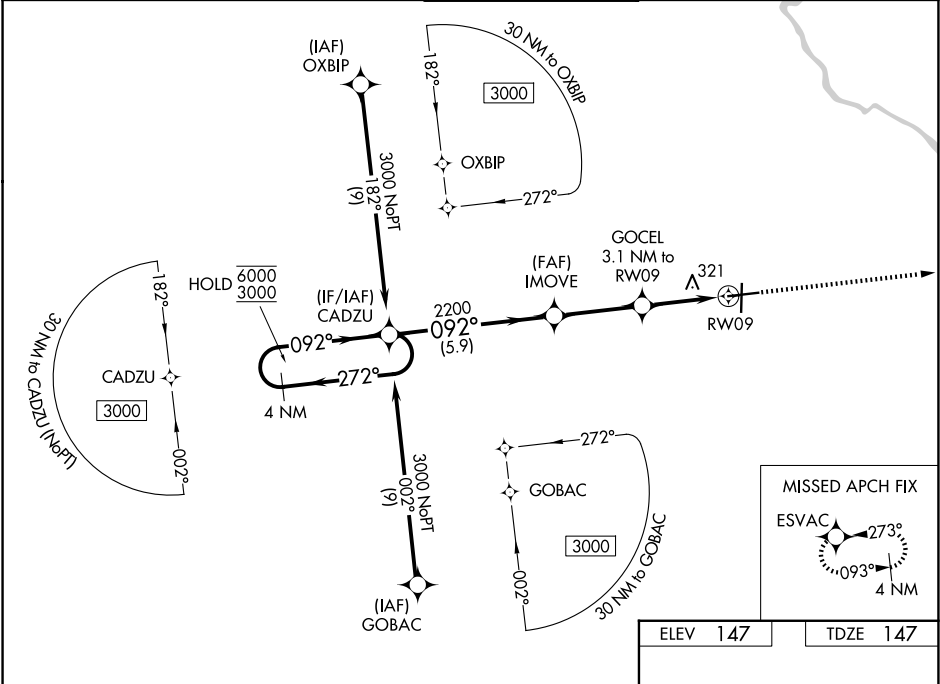

4 NM Holding Pattern		CADZU		2000 ESVAC	
6000 ← 272°		3000 → 092°		IMOVE	
GP 3.00°		TCH 59		GOCEL 3.1 NM to RWY 9	
				1.2 NM to RWY 9	
				RWY 9	
				5.9 NM	
				3.2 NM	
				1.9 NM	
				1.2 NM	
CATEGORY	A	B	C	D	
LPV DA		347-1/2	200 (200-1/2)		
LNAV/VNAV DA		603-7/8	456 (500-7/8)		
LNAV MDA	580-1/2	433 (500-1/2)	580-3/4	433 (500-3/4)	
CIRCLING	640-1 493 (500-1)	660-1 513 (600-1)	900-2 1/4 753 (800-2 1/4)	900-2 1/2 753 (800-2 1/2)	

ELEV 147 TDZE 147

TWR 61

6

0.4% UP

0.5% UP

1

6000 X 150

6502 X 150

092°

REIL Rwy 1, 19 and 27 1
HIRL Rwy 9-27 1
MIRL Rwy 1-19