


WAAS CH 69599 W23A	APP CRS 230°	Rwy Ldg 11981 TDZE 799 Apt Elev 815
--	------------------------	--

RNAV (GPS) RWY 23
FORT WAYNE INTL (FWA)

ASR For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). DME/DME RNP-0.3 NA.			MISSED APPROACH: Climb to 3000 direct EBACO and hold.	
ATIS 121.25 360.825	FORT WAYNE APP CON 127.2 284.6	FORT WAYNE TOWER 119.1 269.325	GND CON 121.9 348.6	CLNC DEL 124.75

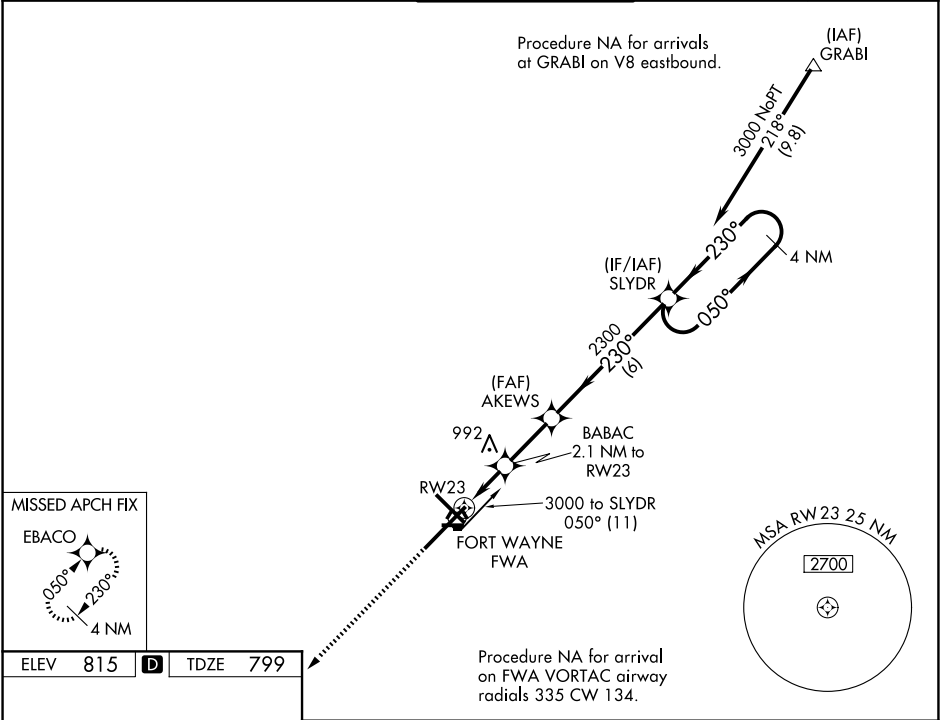

		3000 EBACO VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 76).		4 NM Holding Pattern	
*LNAV only.		BABAC 2.1 NM to RW23		AKEWS 2300	
RW23		*1.3 NM to RW23		SLYDR 230°	
1.3		0.8		2.4 NM	
CATEGORY		A		B	
LPV DA		1053/40		254 (300-¾)	
LNAV/VNAV DA		1230-1⅜		431 (500-1⅝)	
LNAV MDA		1300/55 501 (500-1)		1300-1⅜ 501 (500-1⅝)	
CIRCLING		1300-1 485 (500-1)		1420-1¾ 605 (700-1¾)	
				1520-2¼ 705 (800-2¼)	
				1520-2½ 705 (800-2½)	

EC-2, 30 OCT 2025 to 27 NOV 2025

EC-2, 30 OCT 2025 to 27 NOV 2025