NANDR THREE DEPARTURE (RNAV)

LONE STAR DEP CON
118.1 306.95 (Rwys 34, 35)
135.975 379.9 (Rwys 16, 17)
ATIS
120.7
CLNC DEL
124.65
GND CON 121.9
MEACHAM TOWER
118.3 257.8

RNAV 1 - DME/DME/IRU or GPS.
RADAR required.

TOP ALTITUDE: ASSIGNED BY ATC

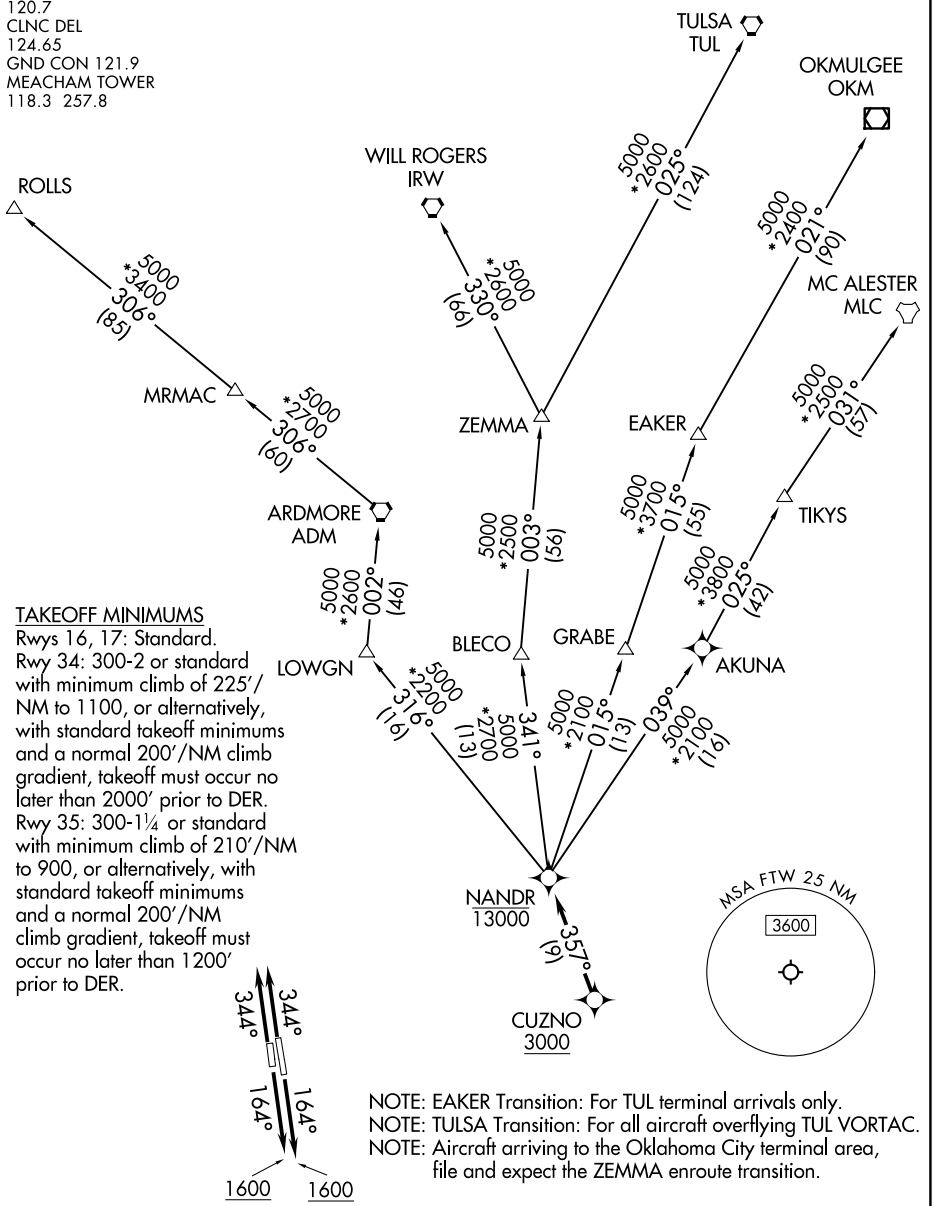

TAKEOFF MINIMUMS
Rwys 16, 17: Standard.
Rwy 34: 300-2 or standard with minimum climb of 225′/NM to 1100, or alternatively, with standard takeoff minimums and a normal 200′/NM climb gradient, takeoff must occur no later than 2000′ prior to DER.
Rwy 35: 300-1¼ or standard with minimum climb of 210′/NM to 900, or alternatively, with standard takeoff minimums and a normal 200′/NM climb gradient, takeoff must occur no later than 1200′ prior to DER.

NOTE: EAKER Transition: For TUL terminal arrivals only.
NOTE: TULSA Transition: For all aircraft overflying TUL VORTAC.
NOTE: Aircraft arriving to the Oklahoma City terminal area, file and expect the ZEMMA enroute transition.

NOTE: Chart not to scale.

(CONTINUED ON FOLLOWING PAGE)

SC-2, 30 OCT 2025 to 27 NOV 2025