

HI-ILS Y or LOC Y RWY 36

LOC I-FWH 109.3	APCH CRS 357°	Rwy Idg 11,999 TDZE 650 Arpt Elev 650	[USN]	FORT WORTH NAS JRB (CARSWELL FLD) (KNFW)
TACAN required * When ALS inop, increase vis to ¾ mile. ** When ALS inop, increase vis to 1½ miles. *** When ALS inop, increase vis to 1¾ miles.			ALSF-1	MISSED APPROACH: Climb to 2000, then climbing left turn to 3000 to intercept NFW TACAN R-333 to HIPOL and hold.

ATIS★ 351.675	LONE STAR APP CON 125.8 257.95	NAVY FORT WORTH TOWER★ 120.95 269.325	GND CON 121.675 279.575	CLNC DEL 126.4 254.325	ASR/ PAR
------------------	-----------------------------------	--	----------------------------	---------------------------	-------------

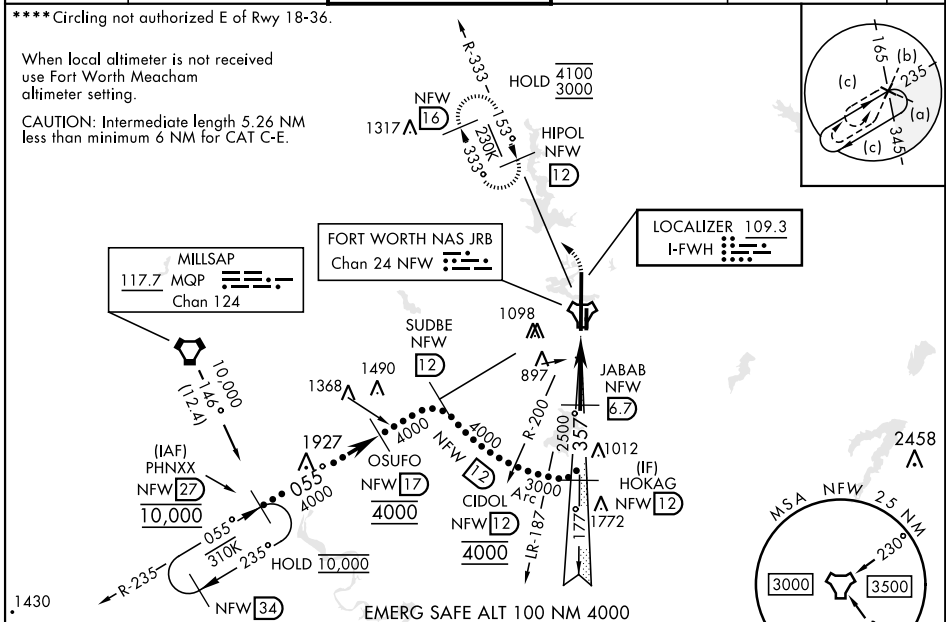


Diagram illustrating the Fort Worth Meacham Altimeter system. The diagram shows the following components and settings:

- HOKAG NFW** (Hokag Non-Fuel Warning) at 12,000 feet.
- JABAB NFW** (Jabab Non-Fuel Warning) at 6,700 feet.
- DOMPE NFW** (Dompe Non-Fuel Warning) at 1,600 feet.
- TACAN** (Tactical Air Navigation) at 2,481 feet.
- GS 3.00° TCH 59** (Ground Station 3.00 degrees, Threshold 59).
- VDP NA** (Visual Descent Point Not Applicable) when using FTW altimeter setting.
- Altitude Settings:** 3000, 2500, 2481, 2000, 3000, 12000.
- Distances:** 5.2 NM, 0.5 NM.

Diagram illustrating the Fort Worth Meacham Altimeter system. The diagram shows the following components and settings:

- HOKAG NFW** (Hokag Non-Fuel Warning) at 12,000 feet.
- JABAB NFW** (Jabab Non-Fuel Warning) at 6,700 feet.
- DOMPE NFW** (Dompe Non-Fuel Warning) at 1,600 feet.
- TACAN** (Tactical Air Navigation) at 2,481 feet.
- GS 3.00° TCH 59** (Ground Station 3.00 degrees, Threshold 59).
- VDP NA** (Visual Descent Point Not Applicable) when using FTW altimeter setting.
- Altitude Settings:** 3000, 2500, 2481, 2000, 3000, 12000.
- Distances:** 5.2 NM, 0.5 NM.

CATEGORY	C	D	E
S-ILS 36 *	850-½	200	(200-½)
S-LOC 36 **	1180-1	530	(600-1)
CIRCLING ****	1320-1¾ 670 (700-1¾)	1340-2¼ 690 (700-2¼)	1440-2¾ 790 (800-2¾)
FORT WORTH MEACHAM ALTIMETER			
S-ILS 36 *	870-½	220	(300-½)
S-LOC 36 ***	1200-1½	550	(600-1½)
CIRCLING ****	1340-2 690 (700-2)	1360-2¼ 710 (800-2¼)	1460-2¾ 810 (900-2¾)

Diagram illustrating the Fort Worth Meacham Altimeter system. The diagram shows the following components and settings:

- HOKAG NFW** (Hokag Non-Fuel Warning) at 12,000 feet.
- JABAB NFW** (Jabab Non-Fuel Warning) at 6,700 feet.
- DOMPE NFW** (Dompe Non-Fuel Warning) at 1,600 feet.
- TACAN** (Tactical Air Navigation) at 2,481 feet.
- GS 3.00° TCH 59** (Ground Station 3.00 degrees, Threshold 59).
- VDP NA** (Visual Descent Point Not Applicable) when using FTW altimeter setting.
- Altitude Settings:** 3000, 2500, 2481, 2000, 3000, 12000.
- Distances:** 5.2 NM, 0.5 NM.